



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
10.04.2002 Bulletin 2002/15

(51) Int Cl.7: **G09G 3/36**

(21) Application number: **01123766.6**

(22) Date of filing: **04.10.2001**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
 Designated Extension States:
AL LT LV MK RO SI

- **Kumada, Kouji**
Tenri-shi, Nara 632-0072 (JP)
- **Ohta, Takashige**
Yamatokoriyama-shi, Nara 639-1124 (JP)
- **Mizukata, Katsuya**
Shijonawate-shi, Osaka 575-0013 (JP)

(30) Priority: **06.10.2000 JP 2000308394**

(71) Applicant: **SHARP KABUSHIKI KAISHA**
Osaka 545-8522 (JP)


(74) Representative: **Müller . Hoffmann & Partner**
Patentanwälte
Innere Wiener Strasse 17
81667 München (DE)

(72) Inventors:
 • **Yanagi, Toshihiro**
Taki-gun Mie 519-2157 (JP)

(54) **Active matrix type display device and a driving method thereof**

(57) In an active matrix type display device, a signal voltage is applied from a signal line driving circuit via an active element such as a TFT to display electrodes on a matrix substrate, and a common voltage is applied to a counter electrode on a facing substrate so that the common voltage is shared by respective display cells. A level of the common voltage is switched in every refresh period of a different length. Thus, it is possible to appropriately set a value of the common voltage which is a reference for specifying an effective voltage of positive polarity and an effective voltage of negative polarity according to the refresh periods. As a result, even when the refresh periods of a different length exist in a mixed manner, it is possible to equalize the effective voltage of positive polarity and the effective voltage of negative polarity so as to suppress an occurrence of a flicker.

FIG. 1

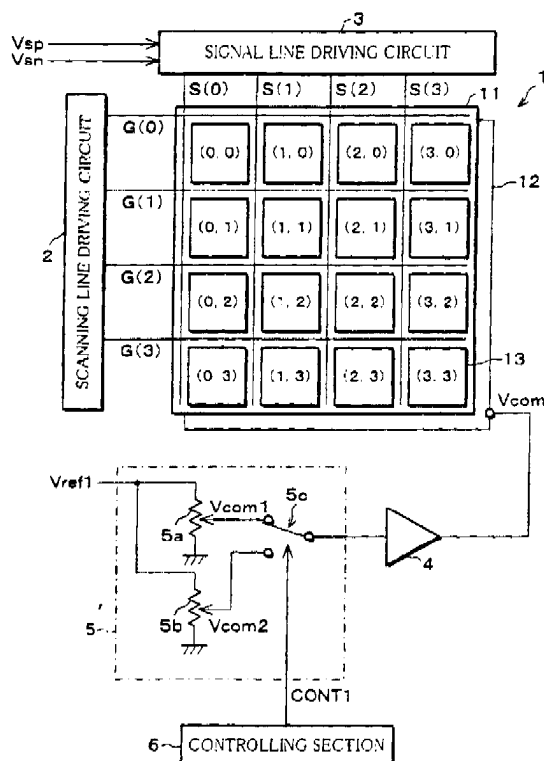

Description

FIELD OF THE INVENTION

[0001] The present invention relates to an active matrix type display device which can improve display quality by reducing the flicker, and a driving method of the active matrix type display device.

BACKGROUND OF THE INVENTION

[0002] A liquid crystal display device which employs an active matrix driving method is known as a conventional image display device. The liquid crystal display device, as shown in FIG. 19, includes a liquid crystal panel 1, a scanning line driving circuit 2, a signal line driving circuit 3, and a buffer circuit 4.

[0003] The liquid crystal panel 1 includes a matrix substrate 11, a facing substrate 12 provided so that it faces the matrix substrate 11 in parallel, and liquid crystal (not shown) filled between the both substrates 11 and 12. There are a plurality of scanning lines G(0) to G(3) and a plurality of signal lines S(0) to S(3) which cross each other and display cells 13 provided in a matrix manner on the matrix substrate 11. Counter electrode 16 shown in FIG. 20 is provided on the facing substrate 12 so that the counter electrode 16 solely corresponds to the display cells 13. Note that, although a case where the counter electrode 16 is provided on the facing substrate 12 is shown here, there is also an IPS (In Plane Switching) structure in which the counter electrode 16 is provided on the matrix substrate 11.

[0004] The display cell 13, as shown in FIG. 20, includes a thin film transistor (hereinbelow referred to as TFT) 14 which is a switching element, and a liquid crystal capacitance CLC. A source of the TFT 14 is connected to the signal line S(i), and a gate of the TFT 14 is connected to the scanning line G(j). Signal voltages V_{sp} and V_{sn} which are outputted from the signal line driving circuit 3 to the signal line S(i) are applied as a drain voltage V_d(i,j) via the source and a drain of the TFT 14 to a display electrode 15 which is an electrode of the liquid crystal capacitance CLC. Further, a common voltage V_{com} which is outputted from the buffer circuit 4 shown in FIG. 19 is applied to the counter electrode 16 which is another electrode of the liquid crystal capacitance CLC.

[0005] In this way, when potential difference between the drain voltage V_d(i,j) and the common voltage V_{com} is applied to the liquid crystal capacitance CLC, the transmittance or the reflection ratio of the liquid crystal 17 between the both electrodes 15 and 16 are changed, so that an image which corresponds to an inputted image data is displayed on the display cells 13. Further, a charge accumulated in the liquid crystal capacitance CLC is stored in for a given period, so that an image is kept displayed in the respective display cells 13, corresponding to the holding of the charge, even when the

TFT 14 is OFF.

[0006] A method for displaying an image by scanning (applying) successively like the foregoing driving method is called a refresh method. Further, a period in which the signal voltages V_{sp} and V_{sn} are applied to the display cell 13, and further, the signal voltages V_{sp} and V_{sn} are stored by the liquid crystal capacitance CLC is called a refresh period.

[0007] In this liquid crystal display device, as shown in FIG. 21, when a gate pulse of potential differences (V_{gh} to V_{gl}) is outputted from the scanning line driving circuit 2 to the scanning line G(j) in the first refresh period T_{v1}, the TFT 14 becomes ON, so that the signal voltage V_{sp} of positive polarity which is being outputted from the signal line driving circuit 3 to the signal line S(i) in this while is applied to the display cell 13. Thereafter, the signal voltage V_{sp} is stored by the liquid crystal capacitance CLC. In the next refresh period T_{v1}, the signal voltage V_{sn} of negative polarity which is being outputted from the signal line driving circuit 3 to the signal line S(i) is applied to the display cell 13 and stored in the same manner, while the TFT 14 is ON. In the liquid crystal display device, in order to prevent deterioration of the liquid crystal due to the application of the d.c. voltage, the signal voltages V_{sp} and V_{sn} of a different polarity are applied repeatedly, so that the liquid crystal is a.c.-driven, for example, in every dot.

[0008] Further, a luminous property is specified by an effective value (effective voltage V_{rms}(P1) and V_{rms}(N1)) of a differential voltage between the signal voltages V_{sp} and V_{sn} which is stored by the liquid crystal capacitance CLC. Thus, when the effective voltage V_{rms}(P1) is not equal to the effective voltage V_{rms}(N1), change of the luminance occurs in every refresh period, so that flicker occurs in the screen. As a result, the display quality degrades so much, and a residual DC which can bring about the deterioration of the liquid crystal is applied to the liquid crystal.

[0009] For example, in order to clear the foregoing defect, as shown in FIG. 19, an offset adjusting circuit 31 made of a variable resistance is provided in a conventional liquid crystal display device. In the offset adjusting circuit 31, a power supply voltage V_{ref} is adjusted by the offset adjusting circuit 31 and the common voltage V_{com} is changed so that the effective voltage V_{rms}(P1) is equal to the effective voltage V_{rms}(N1). In this way, the common voltage V_{com} is adjusted, so that it is possible to suppress the flicker. The prior art, for example, is disclosed in Japanese Unexamined Patent Publication No. 15452/1999 (Tokukaihei 11-15452) (publication date: January 22, 1999).

[0010] Incidentally, as shown in FIG. 21, there is a liquid crystal display device whose display is switched in a high-speed refresh display mode (hereinbelow referred to as display mode A) for displaying in a short refresh period T_{v1} and in a low-speed refresh display mode (hereinbelow referred to as B mode) for displaying in a long refresh period T_{v2}. In this case, even when

the signal voltages V_{sp} and V_{sn} are applied to the display cell 13 and are stored, in the display mode B whose refresh period is long, the effective voltage $V_{rms}(P2)$ is not equal to the effective voltage $V_{rms}(N2)$ in the refresh periods T_{v2} and T_{v2} . This is caused by the following operating characteristic of the TFT 14.

[0011] First, as shown in FIG. 21, when the signal voltage V_{sp} is applied and is stored, an OFF voltage $V_{off}(P)$ of the TFT 14 is a difference between a high stored potential and the potential V_{gl} . When the signal voltage V_{sn} is applied and is stored, an OFF voltage $V_{off}(N)$ of the TFT 14 is a difference between a low stored potential and the potential V_{gl} .

[0012] Further, as shown in $V_{gd} - I_d$ characteristic of FIG. 22 (V_{gd} shows a voltage of the gate/drain line, and I_d shows a drain current), the TFT 14 is not an ideal switch in that a leak current flows when it is OFF, and a leak current corresponding to the OFF voltage $V_{off}(N)$ and a leak current corresponding to the OFF voltage $V_{off}(P)$ are different in power.

[0013] Thus, the case where the signal voltage V_{sp} is applied and stored is deferent from the case where the signal voltage V_{sn} is applied and stored, in terms of amount of leak discharge in storing the voltage. As a result, as shown in FIG. 21, the effective voltage $V_{rms}(P2)$ and the effective voltage $V_{rms}(N2)$ which are based on the common voltage V_{com} decline in different inclination, so that imbalance occurs. As the influence of this, the longer the refresh period becomes, the more imbalance occurs, so that change of the luminance occurs every time the refresh period changes. As a result, flicker occurs, and the quality of a displayed image degrades.

[0014] Note that, the refresh period is changed when a display mode is changed by a computer display, or when a TV display mode (NTSC and PAL) is switched. In addition to this, the refresh period is changed in low-frequency driving and cessation driving both of which are performed so that power can be saved.

[0015] Further, a leak current which occurs in the liquid crystal itself and other cause (leak current of the liquid crystal capacitance itself) bring about the imbalance of the effective voltages $V_{rms}(P2)$ and $V_{rms}(N2)$. Therefore, in order to suppress the occurrence of the flicker due to these causes, it is required to clear the imbalance of the effective voltage, regardless of the length of the refresh period.

SUMMARY OF THE INVENTION

[0016] The object of the present invention is to provide an active matrix type display device which can clear an imbalance of an effective voltage even though refresh periods of a different length exist in a mixed manner, and to provide a driving method of the active matrix type display device.

[0017] In the active matrix type display device and its driving method of the present invention, in order to

achieve the foregoing object, the active matrix type display device includes plural display electrodes provided in a matrix manner; a counter electrode which is provided so that it faces the display electrode and a common voltage is applied to the counter electrode; an active element for applying a signal voltage to the display electrode when a scanning line is selected; and a storage capacitor for storing a driving voltage which is determined by the signal voltage applied to the display electrode and a common voltage. The active matrix type display device enables level varying means to change a level of the common voltage or the signal voltage according to the length of the applying-storing period in which the signal voltage is applied and the driving voltage is stored.

[0018] For example, in a liquid crystal display device, as described above, an optical response of the liquid crystal is specified by an effective value of the driving voltage which is stored by the storage capacitor, so that the effective value of the driving voltage varies according to the applying-storing period (refresh period). Thus, the level of the common voltage or the signal voltage is varied by the level varying means of the display device, so that the effective value of the driving voltage which is determined by the signal voltage and the common voltage is changed. In order to vary the level of the common voltage or the signal voltage, it is preferable that, for example, plural d.c. voltages as the common voltage or the signal voltage is used, and the d.c. voltages are changed by the voltage switching means in every applying-storing period of a different length. Therefore, it is possible to clear the imbalance of the effective value of the driving voltage by varying the level of the common voltage appropriately.

[0019] For a fuller understanding of the nature and advantages of the invention, reference should be made to the ensuing detailed description taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020]

FIG. 1 is a block diagram showing a structure of a liquid crystal display device according to the first embodiment of the present invention.

FIG. 2 is a wave-form figure showing a driving operation of the liquid crystal display device.

FIG. 3(a) and FIG. 3(b) are circuit diagrams showing other structures of an offset voltage setting section of the liquid crystal display device of FIG. 1.

FIG. 4 is a block diagram showing a structure of the liquid crystal display device according to the second embodiment of the present invention.

FIG. 5 is a wave-form figure showing a driving operation of the liquid crystal display device of FIG. 4. FIG. 6(a) and FIG. 6(b) are circuit diagrams showing other structures of the offset voltage setting sec-

tion of the liquid crystal display device of FIG. 4. FIG. 7 is a wave-form figure showing a driving operation of the liquid crystal display device according to a modification example of the second embodiment of the present invention.

FIG. 8 is a block diagram showing a structure of the liquid crystal display device according to the third embodiment of the present invention.

FIG. 9 is a wave-form figure showing a driving operation of the liquid crystal display device of FIG. 8.

FIG. 10 is a block diagram showing a structure of the liquid crystal display device according to the fourth embodiment of the present invention.

FIG. 11 is a wave-form figure showing a driving operation of the liquid crystal display device of FIG. 10. FIG. 12 is a block diagram showing a structure of the liquid crystal display device according to a modification example of the fourth embodiment of the present invention.

FIG. 13 is a block diagram showing a structure of the liquid crystal display device according to the fifth embodiment of the present invention.

FIG. 14 is a wave-form figure showing a driving operation of the liquid crystal display device of FIG. 13. FIG. 15 is a block diagram showing a structure of the liquid crystal display device according to the sixth embodiment of the present invention.

FIG. 16 is a wave-form figure showing a driving operation of the liquid crystal display device of FIG. 15. FIG. 17 is a cross sectional view showing a structure of the liquid crystal display device according to the first to sixth embodiments of the present invention.

FIG. 18 is a plan view showing a structure of the liquid crystal display device of FIG. 17.

FIG. 19 is a block diagram showing a structure of a conventional liquid crystal display device.

FIG. 20 is an equivalent circuit diagram showing a structure of a display cell in the liquid crystal display device of the prior art and the present invention.

FIG. 21 is a wave-form figure showing a driving operation of the conventional liquid crystal display device.

FIG. 22 is a graph showing a general operation characteristic of a TFT.

DESCRIPTION OF THE EMBODIMENT

[first embodiment]

[0021] The first embodiment of the present invention is described as follows based on FIG. 1 to FIG. 3, and FIG. 20.

[0022] A liquid crystal display device according to the present embodiment, as shown in FIG. 1, includes a liquid crystal panel 1, a scanning line driving circuit 2, a signal line driving circuit 3, and a buffer circuit 4, as in the conventional liquid crystal display device described

above, and further includes an offset voltage setting section 5 and a controlling section 6.

[0023] The liquid crystal panel 1 includes a matrix substrate 11, a facing substrate 12 provided so that it faces the matrix substrate 11 in parallel, liquid crystal (not shown) filled between the both substrates 11 and 12. There are a plurality of scanning lines G(0) to G(3) and a plurality of signal lines S(0) to S(3) which cross each other and display cells 13 provided in a matrix manner on the matrix substrate 11.

[0024] The display cell 13, as shown in FIG. 20, is provided in an area which is surrounded by two adjacent scanning lines G(j) and G(j+1) and two adjacent signal lines S(i) and S(i+1). The display cell 13 are made up of a thin film transistor (hereinafter referred to as TFT) 14 which is a switching element, and a liquid capacitance CLC. Note that, although there is a panel which is provided with an auxiliary capacitance in parallel with the liquid crystal capacitance CLC so that the display cell includes the auxiliary capacitance, an explanation thereof is omitted here so as to simplify the description.

[0025] A gate of the TFT 14 is connected to the scanning line G(j), and a source of the TFT 14 is connected to the signal line S(i). A signal voltage V_{sp} for positive polarity and a signal voltage V_{sn} for negative polarity are provided to the signal line S(i). Note that, although there is a case where respective voltages for positive polarity and for negative polarity are required when plural gradations are displayed, an explanation thereof is omitted here so as to simplify the description.

[0026] The liquid crystal capacitance CLC is made up of a display electrode 15 which is connected to the drain of the TFT 14, a counter electrode 16 which faces the display electrode 15, and the liquid crystal 17 exists between the both electrodes 15 and 16. Of them, the counter electrode 16 is provided on the foregoing facing substrate 12 (see FIG. 1) so that the counter electrode 16 solely corresponds to all the display cells 13.

[0027] In the display cell 13 like this, the display electrode 15 is connected via the drain and the source of the TFT 14 to the signal line S(i), and the gate of the TFT 14 is connected to the scanning line G(j). Further, the common voltage V_{com} which is outputted from the buffer circuit 4 shown in FIG. 1 is applied to the counter electrode 16. In this way, a voltage which is applied to the signal line S(i) is applied to the display electrode 15 while the TFT is ON, and a potential difference between the voltage and the common voltage V_{com} which is applied to the counter electrode 16 changes the transmittance or the reflection ratio of the liquid crystal, and an image corresponding to the inputted data is displayed on the display cells 13. Further, in respective display cells 13, a charge accumulated in the liquid crystal capacitance CLC is stored for a given period, so that the image is kept displayed corresponding to the maintenance of the charge even when the TFT 14 is OFF.

[0028] The scanning line driving circuit 2 shown in FIG. 1 shifts a start pulse given from outside at a clock

timing, and further, outputs a gate pulse for selecting the scanning lines G(0) to G(3) which is described later via the buffer circuit (not shown) provided within. While, the signal line driving circuit 3 shifts a start pulse given from outside at a clock timing, and samples image data based on the shift pulse. Thereafter, the image data is held, and the image data of one line is outputted via the buffer circuit (not shown) provided within to the scanning lines S(0) to S(3).

[0029] The offset setting section 5 includes resistances 5a and 5b, and a switch 5c. In each resistance 5a and 5b which functions as voltage setting means, the d. c. standard potential V_{ref1} is applied to an end and the other end is grounded. Further, the resistances 5a and 5b are variable resistances, so that they can adjust the offset, and the first voltage V_{com1} and the second voltage V_{com2} are supplied from taps of the resistances 5a and 5b respectively. The first voltage V_{com1} is inputted to one connecting point of two connecting points of the switch 5c, and the second voltage V_{com2} is inputted to the other connecting point of the switch 5c. In the switch 5c, the connecting points are switched by a controlling signal CONT1 which is transmitted from the controlling section 6 described later, and any one of the first voltage V_{com1} and the second voltage V_{com2} which are inputted to the switch 5 are outputted to the buffer circuit 4.

[0030] The buffer circuit 4 outputs one inputted voltage out of the first voltage V_{com1} and the second voltage V_{com2} as the common voltage V_{com} to the counter electrode 16. The first voltage V_{com1} becomes a voltage level of the common voltage V_{com} in the case of the display mode A for performing the high-speed refresh. The second voltage V_{com2} becomes a voltage level of the common voltage V_{com} in the case of the display mode B for performing the low-speed refresh.

[0031] The controlling section 6 is a system controller including a CPU etc., and has a function for switching the display mode A/the display mode B. For example, in a case where the present liquid crystal display device is applied to a cellular phone, in the display mode A, a refresh operation is performed at high speed under normal displaying condition such as a condition in speaking. Further, in the display mode B, a refresh operation is performed at low speed under minimum displaying condition such as a standby condition.

[0032] Further, in a general liquid crystal display device used in a television or a monitor of a computer, the following display modes A and B may be used. For example, there is a case where the display modes A and B are switched when the display modes are changed by a computer display, or when a TV display mode (NTSC and PAL) is switched. In addition to this, the display modes A and B are switched in low-frequency driving and cessation driving both of which are performed so that power can be saved.

[0033] Here, a switching operation of the common voltage V_{com} in the liquid crystal display device which

is arranged as above is described.

[0034] Based on an arbitrary display cell 13, a case where the liquid crystal 17 is a.c. driven per applying scanning of the display cell 13 is described. As shown in FIG. 2, in the display mode A, when gate pulses (gate ON voltage V_{gh} , gate OFF voltage V_{gl}) of potential differences (V_{gh} to V_{gl}) are outputted from the scanning line driving circuit 2 to the scanning line G(j) in the first refresh period T_{v1} , the TFT 14 is ON. Thus, the signal voltage V_{sp} of positive polarity which is being outputted from the signal line driving circuit 3 to the signal line S(i) in this while is applied to the display cell 13. Thereafter, the signal voltage V_{sp} is stored by the liquid crystal capacitance CLC. In the next refresh period T_{v1} , the signal voltage V_{sn} of negative polarity which is being outputted from the signal line driving circuit 3 to the signal line S(i) is applied to the display cell 13 and stored in the same manner, while the TFT 14 is ON.

[0035] In the offset voltage setting section 5, the switch 5c is switched to the side of the resistance 5a by the controlling signal CONT1 of "H" level transmitted from the controlling section 6 in the display mode A. By this, the first voltage V_{com1} is selected as the common voltage V_{com} , and is applied to the counter electrode 16. Then, the effective voltage $V_{rms}(P1)$ which is determined in accordance with the first voltage V_{com1} and is applied to the liquid crystal 17 in the first refresh period T_{v1} is almost equal to the effective voltage $V_{rms}(N1)$ which is applied to the liquid crystal 17 in the next refresh period T_{v1} .

[0036] While, in the display mode B, as in the display mode A, the signal voltage V_{sp} is applied and stored in the first refresh period T_{v2} , and the signal voltage V_{sn} is applied and stored in the next refresh period T_{v2} . However, in the offset voltage setting section 5, the switch 5c is switched to the side of the resistance 5b by the controlling signal CONT1 of "L" level transmitted from the controlling section 6 in the display mode B. By this, the common voltage V_{com} is switched to the second voltage V_{com2} which is higher than the first voltage V_{com1} , and is applied to the counter electrode 16. Then, an effective voltage $V_{rms}(P3)$ which is determined in accordance with the second voltage V_{com2} and is applied to the liquid crystal 17 in the first refresh period T_{v2} is almost equal to an effective voltage $V_{rms}(N3)$ which is applied to the liquid crystal 17 in the next refresh period T_{v2} .

[0037] Thus, in the liquid crystal display device of the present embodiment, in the offset voltage setting section 5, a level of the common voltage V_{com} is switched in the display mode A and the display mode B in which the refresh periods T_{v1} and T_{v2} are different in the length. By this, different common voltages V_{com} (the first and second voltages V_{com1} and V_{com2}) are set in the refresh periods T_{v1} and T_{v2} respectively. Thus, respective common voltages V_{com} in the display modes A and B are set appropriately as described above, so that it is possible to clear almost all the imbal-

ance between the effective voltage of positive polarity and the effective voltage of negative polarity. And the imbalance occurs because the amount of the leak discharge differs in the display mode A and in the display mode B when the TFT 14 is OFF. As a result, it is possible to suppress the flicker which occurs in a displayed image, so that it is possible to improve the quality of the displayed image.

[0038] Note that, in the present embodiment, although a storage capacitor includes only the liquid crystal capacitance CLC, the storage capacitor may be arranged by combining the liquid crystal capacitance CLC and the auxiliary capacitance. Further, an electrode structure may be a structure such as an IPS mode in which the counter electrode 16 is provided on the matrix substrate 11.

[0039] Next, a modification example of the present embodiment is described.

[0040] In the liquid crystal display device according to the present modification example, as shown in FIG. 3 (a), the offset voltage setting section 5 includes resistances 5e to 5h which function as voltage setting means instead of the foregoing resistances 5a and 5b, and includes a switch 5i instead of the foregoing switch 5c. The switch 5i is arranged so that a pair of switches having two connecting points are provided in positive.

[0041] The standard potential V_{ref1} is applied to an end of the resistance 5e and an end of the resistance 5f, and another end of the resistance 5e and another end of the resistance 5f are connected to different connecting points provided on one side of the switch 5i. While, in each resistance 5g and 5h, an end is grounded and the other end is connected to each different connecting point provided on another side of the switch 5i.

[0042] When the controlling signal CONT1 is "H" level, the switch 5i connects respective connecting points which are connected to the resistances 5e and 5g to the buffer circuit 4. Further, when the controlling signal CONT1 is "L" level, the switch 5i connects respective connecting points which are connected to the resistances 5f and 5h to the buffer circuit 4.

[0043] According to the structure, the offset voltage setting section 5 is arranged so that the switch 5i connects the resistances 5e and 5g in positive in the display mode A, so that the standard potential V_{ref1} is divided by the resistances 5e and 5g, and the first voltage V_{com1} is obtained. While, in the display mode B, the switch 5i connects the resistances 5f and 5h in positive, so that the standard potential V_{ref1} is divided by the resistances 5f and 5h, and the second voltage V_{com2} is obtained.

[0044] In the structure of the offset voltage setting section 5 which uses the resistances 5a and 5b described above, even when the resistances 5a and 5b are not connected to the switch 5c, a current always flows in the resistances 5a and 5b. Thus, as more display modes which are different in length are set, the number of resistance setting circuits such as the resistances 5a and 5b increases. As a result, a current flows

in all the resistance setting circuits, so that power consumption increases.

[0045] On the other hand, according to the foregoing structure, any one of the resistances 5e and 5g, or any one of the resistances 5f and 5h is not connected by the switch 5i, so that a current does not flow in the resistances which are not connected. As a result, power is not consumed. Thus, this arrangement does not allow the power consumption to increase, even when more display modes which are different in the length are set, and the number of the resistance setting circuits increases.

[0046] Further, in the liquid crystal display device according to another modification example, as shown in FIG. 3(b), the offset voltage setting section 5 includes resistances 5k and 5j which are connected in positive instead of the resistances 5a and 5b of FIG. 1. The resistances 5j and 5k which function as voltage setting means are variable resistances, and the first voltage V_{com1} and the second voltage V_{com2} are supplied from taps of the respective resistances. The first voltage V_{com1} is inputted to one connecting point of the switch 5c, and the second voltage V_{com2} is inputted to the other connecting point of the switch 5c.

[0047] The structure allows the offset voltage setting section 5 to connect the switch 5c to the resistance 5j on the side of a low potential in the display mode A, so that the first voltage V_{com1} is obtained as the common voltage V_{com} . While, in the display mode B, the switch 5c is connected to the resistance 5k on the side of a high potential, so that the second voltage V_{com2} is obtained as the common voltage V_{com} .

[0048] In the structure, even when more display modes which are different in the length are set, and more common voltage levels are required, it is possible to satisfy the requirement by increasing the number of the taps from which a signal level is supplied. This is possible because the resistances 5j and 5k are connected in positive. Thus, even when many voltage levels of the common voltage V_{com} are required, the number of current paths does not increase, so that a power consumption does not increase.

[0049] Note that, in the present embodiment, although a resistance is used as voltage setting means, a capacitor which can divide a voltage may be used instead of the resistance. This is also the case with embodiments described below.

[second embodiment]

[0050] The second embodiment of the present invention is described as follows based on FIG. 4 to FIG. 6. Note that, in the present embodiment, components having the same function as the components in the first embodiment are given the same reference numerals, and descriptions thereof are omitted.

[0051] A liquid crystal display device according to the present embodiment, as shown in FIG. 4, includes a li-

liquid crystal panel 1, a scanning line driving circuit 2, a signal line driving circuit 3, and a buffer circuit 4 as in the liquid crystal display device of the first embodiment. Further, the present liquid crystal display device includes an offset voltage setting section 7 and a controlling section 8 instead of the offset voltage setting section 5 and the controlling section 6 (see FIG. 1). In the present liquid crystal display device, unlike the liquid crystal display device of the first embodiment, the common voltage V_{com} applied to the counter electrode 16 (see FIG. 20) is fixed at a certain value, and the signal voltages V_{sp} and V_{sn} given to the signal line driving circuit 3 are offset with them corresponding to the display mode.

[0052] The offset voltage setting section 7 includes resistances 7a to 7d and switches 7e and 7f. In each resistance 7a to 7d as voltage setting means, the standard potential V_{ref2} is applied to an end, and the other end is grounded. Further, resistances 7a to 7d are variable resistances, so that it is possible to adjust the offset, and the first voltage V_{sp1} , the second voltage V_{sp2} , the first voltage V_{sn1} , and the second voltage V_{sn2} are supplied from respective taps.

[0053] The first voltage V_{sp1} is inputted to one connecting point of the switch 7e, and the second voltage V_{sp2} is inputted to the other connecting point of the switch 7e. The switch 7e switches any one of the first voltage V_{sp1} and the second voltage V_{sp2} and outputs the switched voltage to the signal driving circuit 3 in accordance with a controlling signal $CONT\ 2$ transmitted from the controlling section 8 which is described later.

[0054] While, the first voltage V_{sn1} is inputted to one connecting point of the switch 7f, and the second voltage V_{sn2} is inputted to the other connecting point of the switch 7f. The switch 7f switches any one of the first voltage V_{sn1} and the second voltage V_{sn2} which are inputted in synchronism with the switch 7e and outputs the switched voltage to the signal driving circuit 3 in accordance with the controlling signal $CONT\ 2$ transmitted from the controlling section 8.

[0055] The controlling section 8 is a system controller including a CPU etc., and has a function for switching for the display mode A/the display mode B as in the controlling section 6 (see FIG. 1) of the first embodiment. The controlling section 8 outputs the controlling signal $CONT\ 2$ of "H" level when the display mode A is set, and outputs the controlling signal $CONT\ 2$ of "L" level when the display mode B is set.

[0056] The following is a description of a switching operation of the signal voltages V_{sp} and V_{sn} in the liquid crystal display device arranged in the foregoing manner.

[0057] Based on an arbitrary display cell 13, a case where the liquid crystal 17 is a.c. driven in ever applying scanning of the display cell 13 is described. As shown in FIG. 5, in the display mode A, when gate pulses (gate ON voltage V_{gh} , gate OFF voltage V_{gl}) of potential differences (V_{gh} to V_{gl}) are outputted from the scanning line driving circuit 2 to the scanning line $G(j)$ in the

first refresh period $T\ v1$, the TFT 14 is ON. Thus, the signal voltage V_{sp} of positive polarity which is being outputted from the signal line driving circuit 3 to the signal line $S(i)$ in this while is applied to the display cell 13. Thereafter, the signal voltage V_{sp} is stored by the liquid crystal capacitance CLC . In the next refresh period $T\ v1$, the signal voltage V_{sn} of negative polarity which is being outputted from the signal line driving circuit 3 to the signal line $S(i)$ is applied to the display cell 13 and stored in the same manner, while the TFT 14 is ON.

[0058] In the offset voltage setting section 7, the switches 7e and 7f are switched to the side of the resistances 7a and 7c by the controlling signal $CONT2$ of "H" level transmitted from the controlling section 8 in the display mode A. By this, the first voltages V_{sp1} and V_{sn1} are selected as the signal voltages V_{sp} and V_{sn} , and are applied to the signal driving circuit 3. Then, the effective voltage $V_{rms}(P1)$ which is determined in accordance with the first voltages V_{sp1} and V_{sn1} and is applied to the liquid crystal 17 in the first refresh period $T\ v1$ is almost equal to the effective voltage $V_{rms}(N1)$ which is applied to the liquid crystal 17 in the next refresh period $T\ v1$.

[0059] While, in the display mode B, as in the display mode A, the signal voltage V_{sp} is applied and stored in the first refresh period $T\ v2$, and the signal voltage V_{sn} is applied and stored in the next refresh period $T\ v2$. However, in the offset voltage setting section 7, the switches 7e and 7f are switched to the side of the resistances 7b and 7d by the controlling signal $CONT2$ of "L" level transmitted from the controlling section 8 in the display mode B. By this, the signal voltages V_{sp} and V_{sn} are switched to the second voltages V_{sp2} and V_{sn2} which are lower than the first voltages V_{sp1} and V_{sn1} , and are applied to the signal line driving circuit 3. Then, an effective voltage $V_{rms}(P4)$ which is determined in accordance with the second voltages V_{sp2} and V_{sn2} and is applied to the liquid crystal 17 in the first refresh period $T\ v2$ is almost equal to an effective voltage $V_{rms}(N4)$ which is applied to the liquid crystal 17 in the next refresh period $T\ v2$.

[0060] Thus, in the liquid crystal display device of the present embodiment, in the offset voltage setting section 7, a level of the signal voltage V_{sp} and V_{sn} are switched in the display mode A and the display mode B in which the refresh periods $T\ v1$ and $T\ v2$ are different in the length. By this, different signal voltages V_{sp} and V_{sn} (the first voltages V_{sp1} and V_{sn1} , and the second voltages V_{sp2} and V_{sn2}) are set in the refresh periods $T\ v1$ and $T\ v2$ respectively. Thus, respective signal voltages V_{sp} and V_{sn} are set appropriately as described above, so that it is possible to clear almost all the imbalance between the effective voltage of positive polarity and the effective voltage of negative polarity. And the imbalance occurs because the amount of the leak discharge differs in the display mode A and in the display mode B when the TFT 14 is OFF. As a result, it is possible to suppress the flicker which occurs in a displayed

image, so that it is possible to improve the quality of the displayed image.

[0061] Next, a modification example of the present embodiment is described.

[0062] Also in the liquid crystal display device according to the present modification example, the offset voltage setting section 7 can be arranged as shown in FIG. 6(a) and FIG. 6(b). Specifically, as shown in FIG. 6(a), the offset voltage setting section 7 includes resistances 7g to 7n which function as voltage setting means instead of the foregoing resistances 7a and 7d, and includes a switches 7o and 7p instead of the switches 7c and 7f. The switches 7o and 7p are arranged so that two pairs of switches having two connecting points are provided in positive.

[0063] According to the structure, in the offset voltage setting section 7, the switch 7o connects the resistances 7g and 7i in positive by the controlling signal CONT2 of "H" level, and the switch 7p connects the resistances 7k and 7m in positive, so that the standard potential Vref2 is divided by the resistances 7g and 7i and the resistances 7k and 7m respectively, and the first voltages Vsn1 and Vsp1 are obtained in the display mode A.

[0064] While, the switch 7o connects the resistances 7h and 7j in positive by the controlling signal CONT2 of "L" level, and the switch 7p connects the resistances 7l and 7n in positive, so that the standard potential Vref2 is divided by the resistances 7h and 7j and the resistances 7l and 7n respectively, and the second voltages Vsn2 and Vsp2 are obtained in the display mode B.

[0065] Further, the liquid crystal display device according to another modification example, as shown in FIG. 6(b), the offset voltage setting section 7 includes resistances 7r to 7u provided in positive instead of the resistances 7a to 7d of FIG. 4. The resistances 7r to 7u as voltage setting means are variable resistances, and the first voltage Vsp1, the second voltage Vsp2, the first voltage Vsn1, and the second voltage Vsn2 are supplied from taps of the respective resistances. The first voltages Vsp1 and Vsn1 are inputted to one connecting point of each switch 7e and 7f, and the second voltages Vsp2 and Vsn2 are inputted to the other connecting point of each switch 7e and 7f.

[0066] According to the structure, in the offset voltage setting section 7, the switches 7e and 7f are connected to the resistances 7r and 7t, so that the first voltages Vsp1 and Vsn1 are obtained in the display mode A. While, in the display mode B, the switches 7e and 7f are connected to the resistances 7s and 7u, so that the second voltages Vsp2 and Vsn2 are obtained in the display mode B.

[0067] In the structures shown in FIG. 6(a) and FIG. 6(b), as in the structures of FIG. 3(a) and FIG. 3(b), when the signal voltages Vsp and Vsn are not outputted, the number of current paths in which a current flows is not increased, even in a case where more display modes which are different in the length are set and more voltage levels are required as the signal voltages Vsp and Vsn

since. Thus, power consumption does not increase.

[0068] Further, in the liquid crystal display device according to another modification example, any one of the signal voltages Vsp and Vsn is solely offset, and the other is fixed at a certain value. The liquid crystal display device can be realized by arranging so that in the offset voltage setting section 7 of FIG. 4, for example, the resistance 7b and the switch 7e are omitted, and the signal voltage Vsp is obtained from the resistance 7a directly.

[0069] In the liquid crystal display device, as shown in FIG. 7, in the first refresh period Tv2 in the display mode B, a constant signal voltage Vsp is applied and stored, and in the next refresh period Tv2, a signal voltage Vsn which is switched from the first voltage Vsn1 of the display mode A to the second voltage Vsn2 of the display mode B is applied and stored.

[0070] In the liquid crystal display device, the signal voltage Vsp is fixed to a certain value, so that amount of the offset signal voltage Vsn (absolute value of the difference between the first voltage Vsn1 and the second voltage Vsn2) is set so that an effective voltage Vrms(P5) is equal to an effective voltage Vrms(N5).

[0071] Further, even when the signal voltage Vsn is fixed to a certain value, and only the signal voltage Vsp is offset, it is possible that the effective voltage Vrms(P5) is equal to the effective voltage Vrms(N5) in the same manner.

[0072] According to the structure, any one of the signal voltages Vsp and Vsn is solely offset, so that it is possible to simplify the structure of the offset voltage setting section 7, compared with the structure of FIG. 4 in which both the signal voltages Vsp and Vsn are offset.

[third embodiment]

[0073] The third embodiment of the present invention is described as follows based on FIG. 8 to FIG. 9. Note that, in the present embodiment, components having the same function as the components in the first and second embodiments are given the same reference numerals, and descriptions thereof are omitted.

[0074] A liquid crystal display device according to the present embodiment, as shown in FIG. 8, includes a liquid crystal panel 1, a scanning line driving circuit 2, a signal line driving circuit 3, a buffer circuit 4, and a controlling section 8, as in the liquid crystal display device of the second embodiment. Further, the present liquid crystal display device includes an offset voltage setting section 9 instead of the offset voltage setting section 7 of the second embodiment (see FIG. 4). The present liquid crystal display device, unlike the liquid crystal display device of the second embodiment, corrects imbalance of the effective voltages in the refresh periods Tv1 and Tv2 which is brought about by a leak current etc. when the TFT 14(see FIG. 20) is OFF in a case where the refresh period is long.

[0075] The offset voltage setting section 9 includes resistances 9a to 9d and switches 9e to 9f. In each resist-

ance 9a to 9d as voltage setting means, the standard potential V_{ref2} is applied to one end, and the other end is grounded. Further, the resistances 9a to 9d are variable resistances, so that it is possible to adjust the offset. And the first voltage V_{sp1} , the third voltage V_{sp3} , the first voltage V_{sn1} , and the third voltage V_{sn3} are supplied from taps of the respective resistances. The third voltages V_{sp3} and V_{sn3} differ from the second voltages V_{sp2} and V_{sn2} (see FIG. 5) in that, according to the length of the refresh period T_{v2} , it is possible to suitably increase or decrease a voltage which compensates the stored voltage dropped due to a leak current etc. which occurs when the TFT 14 is OFF in the refresh period T_{v2} whose voltage storing period became longer.

[0076] The first voltage V_{sp1} is inputted to one connecting point of the switch 9e, and the third voltage V_{sp3} is inputted to the other connecting point of the switch 9e. The switch 9e switches any one of the first voltage V_{sp1} and the third voltage V_{sp3} and outputs the switched voltage to the signal driving circuit 3 in accordance with a controlling signal CONT 2 transmitted from the controlling section 8. While, the first voltage V_{sn1} is inputted to one connecting point of the switch 9f, and the third voltage V_{sn3} is inputted to the other connecting point of the switch 9f. The switch 9f switches any one of the first voltage V_{sn1} and the third voltage V_{sn3} which are inputted in synchronism with the switch 9e and outputs the switched voltage to the signal driving circuit 3 in accordance with the controlling signal CONT 2.

[0077] In the liquid crystal display device arranged in the foregoing manner, as in the liquid crystal display device of the second embodiment, a switching operation of the signal voltages V_{sp} and V_{sn} is performed by the offset voltage setting section 9. As a result, as shown in FIG. 9, in the display mode A, the first voltages V_{sp1} and V_{sn1} are selected as the signal voltages V_{sp} and V_{sn} in the offset voltage setting section 9, and are applied to the signal line driving circuit 3. Then, the effective voltage $V_{rms}(P1)$ which is determined in accordance with the first voltages V_{sp1} and V_{sn1} and is applied to the liquid crystal 17 in the first refresh period T_{v1} is almost equal to the effective voltage $V_{rms}(N1)$ which is applied to the liquid crystal 17 in the next refresh period T_{v1} .

[0078] While, in the display mode B, as in the display mode A, the signal voltages V_{sp} and V_{sn} are applied and stored. However, here, the third voltage V_{sp3} which is higher than the first voltage V_{sp1} is applied and stored in the first refresh period T_{v2} , and the third voltage V_{sn3} which is lower than the first voltage V_{sn1} is applied and stored in the next refresh period T_{v2} .

[0079] In the liquid crystal display device of the second embodiment, the refresh period T_{v2} becomes longer, and amount of a leak current increases when the TFT 14 is OFF. As a result, the stored voltage is largely dropped in the refresh period T_{v2} . Thus, as shown in FIG. 5 of the second embodiment, in applying the signal voltages V_{sp} and V_{sn} whose amplitude is the same in

the refresh periods T_{v1} and T_{v2} , even when $|V_{rms}(P1)| = |V_{rms}(N1)|$ and $|V_{rms}(P4)| = |V_{rms}(N4)|$, $|V_{rms}(P1)| > |V_{rms}(P4)|$ and $|V_{rms}(N1)| > |V_{rms}(N4)|$. Thus, the quality of display in the refresh period T_{v2} degrades.

[0080] Unlike this, in the liquid crystal display device of the present embodiment, as shown in FIG. 9, the third voltages V_{sp3} and V_{sn3} which include compensation of the leak current as the signal voltage are applied in the refresh period T_{v2} , so that the effective voltages $V_{rms}(N1)$, $V_{rms}(N6)$, $V_{rms}(P1)$, and $V_{rms}(P6)$ are equal respectively. Thus, it is possible to keep the quality of display even when the refresh periods are different in the length.

[0081] Further, the offset voltage setting section 9 of the present liquid crystal display device may be arranged as in the offset voltage setting section 7 of FIG. 6(a) and FIG. 6(b) in the second embodiment. Thus, also in the present liquid crystal display device, the number of current paths in which a current flows is not increased when the signal voltages V_{sp} and V_{sn} are not outputted. Thus, even in the case where more display modes which are different in the length are set and more voltage levels are required as the signal voltages V_{sp} and V_{sn} , the number of current paths in which a current flows is not increased. As a result, it is possible to avoid the increase of power consumption.

[fourth embodiment]

[0082] The fourth embodiment of the present invention is described as follows based on FIG. 10 to FIG. 12. Note that, in the present embodiment, components having the same function as the components in the first and second embodiments are given the same reference numerals, and descriptions thereof are omitted.

[0083] A liquid crystal display device according to the present embodiment, as shown in FIG. 10, includes a liquid crystal panel 1, a scanning line driving circuit 2, a signal line driving circuit 3, a buffer circuit 4, and a controlling section 8, as in the liquid crystal display device of the second embodiment. Further, the present liquid crystal display device includes an offset voltage setting section 21 instead of the offset voltage setting section 7 of the second embodiment (see FIG. 4). The present liquid crystal display device, unlike the liquid crystal display device of the second embodiment, as shown in FIG. 11, reverses a level of a source signal V_s in every horizontal line, and offsets a mean potential of an amplitude of the source signal V_s , that is, the level of the source signal V_s . The source signal V_s , as described later, is generated by the offset voltage setting section 21 in accordance with a pulse signal $V_s(ref)$ (see FIG. 10) which includes amplitude of the difference between the signal voltage V_{sp} (the first voltage V_{sp1} and the second voltage $sp2$) and the signal voltage V_{sn} (the first voltage V_{sn1} and the second voltage $sn2$).

[0084] As shown in FIG. 10, the offset voltage setting section 21 includes resistances 21a and 21b, a switch

21c, and an AC coupling capacitor 21d.

[0085] In each resistance 21a to 21b, the standard potential V_{ref3} is inputted to an end, and the other end is grounded. Further, resistances 21a to 21b are variable resistances, so that it is possible to adjust the offset, and a mean potential of an amplitude $V_s(offset1)$ on the side of a high potential and a mean potential of an amplitude $V_s(offset2)$ on the side of a low potential are supplied from taps of respective resistances.

[0086] The mean potential of an amplitude $V_s(offset1)$ is inputted to one connecting point of the switch 21c, and the mean potential of an amplitude $V_s(offset2)$ is inputted to the other connecting point 21c. The switch 21c switches any one of the mean potential of an amplitude $V_s(offset1)$ and the mean potential of an amplitude $V_s(offset2)$ and outputs the switched amplitude potential to the signal line driving circuit 3 by the controlling signal CONT2 transmitted from the controlling section 8. The AC coupling capacitor 21d includes amplitude of the difference between the signal voltages V_{sp} and V_{sn} on one end, and a pulse signal $V_s(ref)$ whose polarity is judged in every horizontal line is inputted to the end. And the other end is connected to the side of the output terminal of the switch 21c.

[0087] According to the liquid crystal display device arranged in the foregoing manner, in the offset voltage setting section 21, a switching operation of the switch 21c allows any one of the mean potential of an amplitude $V_s(offset1)$ and the mean potential of an amplitude $V_s(offset2)$ to be outputted. Then, the pulse signal $V_s(ref)$ whose DC component was removed by the coupling capacitor 21d is superposed on the outputted mean potential of an amplitude. Thus, the source signals V_{s1} and V_{s2} which are different in the refresh periods T_{v1} and T_{v2} respectively are given to the signal line driving circuit 3.

[0088] First, in the display mode A, the source signal V_{s1} is selected in the offset voltage setting section 21, and is given to the signal line driving circuit 3. Then, as shown in FIG. 11, in the first refresh period T_{v1} , the first voltage V_{sp1} (value in a circle) of the source signal V_{s1} is applied and stored in a period of the gate pulse, and in the next refresh period T_{v1} , a voltage of the first voltage V_{sn1} of the source signal V_{s1} is applied and stored in the period of the gate pulse. Here, the effective voltage $V_{rms}(P1)$ which is applied to the liquid crystal 17 in the first refresh period T_{v1} is almost equal to the effective voltage $V_{rms}(N1)$ which is applied to the liquid crystal 17 in the next refresh period T_{v1} by setting a value of the first voltages V_{sp1} and V_{sn1} .

[0089] While, in the offset voltage setting section 21, the source signal V_{s2} is selected in the display mode B. Then, as in the display mode A, the second voltages V_{sp2} and V_{sn2} of the source signal V_{s2} (value in a circle) are applied and stored. Thus, as in the liquid crystal display device of the second embodiment, the effective voltage $V_{rms}(P7)$ becomes almost equal to the effective voltage $V_{rms}(N7)$.

[0090] In this way, in the liquid crystal display device of the present embodiment, the source signal V_s which is reversed in every horizontal line is offset, so that it is possible to improve the quality of a displayed image as in the liquid crystal display device of the second embodiment.

[0091] Note that, in the present embodiment, although amplitude of the source signal V_s (source signals V_{s1} and V_{s2}) is constant, amplitude of the source signals V_{s1} and V_{s2} may be varied. Concretely, amplitude of the source signal V_{s2} is set to be larger than that of the source signal V_{s1} .

[0092] In order to realize the source signals V_{s1} and V_{s2} which are different in amplitude, as shown in FIG. 12, the offset voltage setting section 21 includes AC coupling capacitors 21e and 21f instead of the coupling capacitor 21d, and a resistance 21g (variable resistance) as amplitude varying means. In the AC coupling capacitor 21e, the pulse signal $V_s(ref)$ is inputted to one end, and the other end is connected to an input terminal on the side of the resistance 21b in the switch 21c. In the AC coupling capacitor 21f, the pulse signal $V_s(ref)$ is inputted via the resistance 21g to one end, and the other end is connected to an input terminal on the side of the resistance 21a in the switch 21c.

[0093] In the offset voltage setting section 21, amplitude of the pulse signal $V_s(ref)$ is reduced by the resistance 21, so that the source signal V_{s1} having small amplitude is obtained. While, the source signal V_{s2} whose amplitude is larger than that of the source signal V_{s1} is obtained from the AC coupling capacitor 21e. When the source signals V_{s1} and V_{s2} which are different in amplitude are used, a voltage including compensation of a leak discharge is applied in the refresh period T_{v2} as in the liquid crystal display device of the third embodiment. As a result, it is possible to equalize all the effective voltages $V_{rms}(N1)$, $V_{rms}(N7)$, $V_{rms}(P1)$, and $V_{rms}(P7)$.

[fifth embodiment]

[0094] The fifth embodiment of the present invention is described as follows based on FIG. 13 and FIG. 14. Note that, in the present embodiment, components having the same function as the components in the first embodiment are given the same reference numerals, and descriptions thereof are omitted.

[0095] A liquid crystal display device according to the present embodiment, as shown in FIG. 13, includes a liquid crystal panel 1, a scanning line driving circuit 2, a signal line driving circuit 3, a buffer circuit 4, and a controlling section 6, as in the liquid crystal display device of the first embodiment. Further, the present liquid crystal display device includes an offset voltage setting section 22 instead of the offset voltage setting section 5 of the first embodiment (see FIG. 1). The present liquid crystal display device, unlike the liquid crystal display device of the first embodiment, as shown in FIG. 14, uses a common signal $V_{com}(AC)$ which is reversed in eve-

ry horizontal line, and offsets a mean potential of an amplitude of the common signal $V_{com}(AC)$, that is, the level of the common signal $V_{com}(AC)$. The common signal $V_{com}(AC)$ includes amplitude of the difference between the highest value and the lowest value, and is supplied from the known circuit which is provided outside of the offset voltage setting section 22 and generates a common signal (pulse signal $V_{com}(ref)$ described later) which is reversed.

[0096] As shown in FIG. 13, the offset voltage setting section 22 includes resistances 22a and 22b, a switch 22c, and an AC coupling capacitors 22d and 22e. In each resistance 22a to 22b as voltage setting means, a certain standard potential V_{ref} is inputted to one end, and the other end is grounded. Further, resistances 22a to 22b are variable resistances, so that it is possible to adjust the offset, and a mean potential of an amplitude $V_{com}(offset1)$ on the side of a low potential and a mean potential of an amplitude $V_{com}(offset2)$ on the side of a high potential are supplied from taps of respective resistances.

[0097] The mean potential of an amplitude $V_{com}(offset1)$ is inputted to one connecting point of the switch 22c, and the mean potential of an amplitude $V_{com}(offset2)$ is inputted to the other connecting point 22c. The switch 22c switches any one of the mean potential of an amplitude $V_{com}(offset1)$ and the mean potential of an amplitude $V_{com}(offset2)$ and outputs the switched amplitude potential to the counter electrode 16 (see FIG. 20) by the controlling signal $CONT1$ transmitted from the controlling section 6. Further, in each AC coupling capacitor 22d and 22e, the pulse signal $V_{com}(ref)$ which is reversed in every horizontal line is inputted to one end. And the other end of the AC capacitor 22d is connected to an input terminal on the side of the resistance 22a in the switch 22c, and the other end of the AC capacitor 22e is connected to an input terminal on the side of the resistance 22b in the switch 22c.

[0098] According to the liquid crystal display device arranged in the foregoing manner, in the offset voltage setting section 22, a switching operation of the switch 22c allows any one of the mean potential of an amplitude $V_{com}(offset1)$ and the mean potential of an amplitude $V_{com}(offset2)$ to be outputted. Then, the pulse signal $V_{com}(ref)$ whose DC component was removed by the coupling capacitors 22d and 22e is superposed on the outputted mean potential of an amplitude. Thus, the first and second signals V_{com1} and V_{com2} which are different in the refresh periods $Tv1$ and $Tv2$ respectively are given to the counter electrode 16.

[0099] First, in the offset voltage setting section 22, the first signal V_{com1} is selected as the common signal $V_{com}(AC)$, and is given to the counter electrode 16 in the display mode A. Then, as shown in FIG. 14, in the first refresh period $Tv1$, the differential voltage (value in a circle) between a voltage of the source signal V_s which is applied in a period of the gate pulse and the common signal $V_{com}(AC)$ is applied and is stored as a driving

voltage. While, in the next refresh period $Tv1$, the differential voltage and a differential voltage of a reversed polarity is applied and stored in the period of the gate pulse. Here, the effective voltage $V_{rms}(P1)$ of a liquid crystal driving voltage V_{clc} in the first refresh period $Tv1$ is almost equal to the effective voltage $V_{rms}(N1)$ of the liquid crystal driving voltage V_{clc} in the next refresh period $Tv1$ by setting a value of the first signal V_{com1} .

[0100] Note that, although the source signal V_s is drawn as d.c. to simplify the drawing in FIG. 14, the source signal V_s may be a pulse signal which is in- or off-phase with the common signal $V_{com}(AC)$. When the source signal V_s is DC of 2V, and the common signal $V_{com}(AC)$ has the lowest value of 0V and the highest value of 4V, the liquid crystal driving voltage reverses the polarity in voltage range of $\pm 2V$.

[0101] While, in the offset voltage setting section 22, the second signal V_{com2} is selected as the common signal $V_{com}(AC)$ in the display mode B. Then, as in the display mode A, the differential voltage (value in a circle) is applied and stored. Thus, as in the liquid crystal display device of the first embodiment, the effective voltage $V_{rms}(P8)$ becomes almost equal to the effective voltage $V_{rms}(N8)$.

[0102] In this way, in the liquid crystal display device of the present embodiment, the mean potential of an amplitude (level of the common voltage) of the common signal $V_{com}(AC)$ which is reversed in every horizontal line is offset, so that it is possible to improve the quality of a displayed image as in the liquid crystal display device of the first embodiment.

[sixth embodiment]

[0103] The sixth embodiment of the present invention is described as follows based on FIG. 15 and FIG. 16. Note that, in the present embodiment, components having the same function as the components in the fifth embodiment are given the same reference numerals, and descriptions thereof are omitted.

[0104] A liquid crystal display device according to the present embodiment, as shown in FIG. 15, includes a liquid crystal panel 1, a scanning line driving circuit 2, a signal line driving circuit 3, a buffer circuit 4, and a controlling section 6, as in the liquid crystal display device of the fifth embodiment. Further, the present liquid crystal display device includes an offset voltage setting section 23 instead of the offset voltage setting section 22 of the fifth embodiment (see FIG. 13). The present liquid crystal display device, as in the liquid crystal display device of the fifth embodiment, offsets a mean potential of an amplitude of the common signal $V_{com}(AC)$ in the refresh periods $Tv1$ and $Tv2$, and further, varies the amplitude.

[0105] The offset voltage setting section 23 includes resistances 22a and 22b, resistances 23a and 23b which have the same functions as the functions of a switch 22c and the AC coupling capacitors 22d and 22e,

a switch 23c and AC coupling capacitors 23d and 23e, and further includes a resistance 23f as amplitude varying means. In the offset voltage setting section 23, unlike the offset voltage setting section 22, a pulse signal $V_{com}(ref)$ is inputted via the resistance 23f which is a variable resistance to the AC coupling capacitor 23d.

[0106] In the offset voltage setting section 23, amplitude of the pulse signal $V_{com}(ref)$ is reduced by the resistance 23f, so that the first common voltage V_{com1} having the reduced amplitude AC1 is obtained. While, the second common voltage V_{com2} having amplitude AC2 which is larger than the amplitude AC1 is obtained from the AC coupling capacitor 23e. Thus, not only the central potential, but also the first and second common voltages V_{com1} and V_{com2} which are different also in the amplitude are obtained. Further, the common voltages V_{com1} and V_{com2} are given to the counter electrode 16 in the refresh periods Tv1 and Tv2.

[0107] First, in the offset voltage setting section 23, the first common voltage V_{com1} is selected as the common signal $V_{com}(AC)$, and is given to the counter electrode 16 in the display mode A. Then, as shown in FIG. 16, in the first refresh period Tv1, the differential voltage (value in a circle) between a voltage of the source signal V_s which was fetched in a period of the gate pulse and the first common voltage V_{com1} is applied and is stored. While, in the next refresh period Tv1, the differential voltage and a differential voltage of a reversed polarity is applied and stored in the period of the gate pulse. Here, the effective voltage $V_{rms}(P1)$ of a liquid crystal driving voltage V_{clc} in the first refresh period Tv1 is almost equal to the effective voltage $V_{rms}(N1)$ of the liquid crystal driving voltage V_{clc} in the next refresh period Tv1 by setting a value of the first common voltage V_{com1} .

[0108] While, in the offset voltage setting section 23, the second common voltage V_{com2} is selected as the common signal $V_{com}(AC)$ in the display mode B. Then, as in the display mode A, the differential voltage (value in a circle) is applied and stored. Thus, as in the liquid crystal display device of the first embodiment, the effective voltage $V_{rms}(P9)$ becomes almost equal to the effective voltage $V_{rms}(N9)$. Moreover, amplitude of the common signal $V_{com}(AC)$ is large in the refresh period Tv2, so that amplitude of the liquid crystal driving voltage V_{clc} becomes large. Therefore, as in the liquid crystal display device of the third embodiment, the refresh period Tv2 becomes long, so that it is possible to prevent the drop of the stored voltage which occurs due to a leak discharge when the TFT is OFF. Thus, it is possible to equalize all the effective voltages $V_{rms}(N1)$, $V_{rms}(N9)$, $V_{rms}(P1)$, and $V_{rms}(P9)$.

[0109] Also in the liquid crystal display device of the present embodiment, the common signal $V_{com}(AC)$ which is reversed in every horizontal line is offset, so that it is possible to improve the quality of a displayed image as in the liquid crystal display device of the fifth embodiment.

[0110] Note that, although the source signal V_s is

drawn as d.c. to simplify the drawing in FIG. 16, the source signal V_s may be a pulse signal which is in- or off-phase with the common signal $V_{com}(AC)$. In the display mode A, when the source signal V_s is DC of 2V, and the common signal $V_{com}(AC)$ is AC of 4V, the liquid crystal driving voltage V_{clc} reverses the polarity in voltage range of $\pm 2V$. Further, in the display mode B, the source signal V_s is DC of 2V as in the display mode A. However, when amplitude of the common signal $V_{com}(AC)$ (difference between H level and L level) is equally AC of 5V, the liquid crystal driving voltage V_{clc} reverses the polarity in voltage range of $\pm 2.5V$. In this case, the effective voltages $V_{rms}(N1)$, $V_{rms}(N9)$, $V_{rms}(P1)$, and $V_{rms}(P9)$ become equal.

[0111] Note that, although, in the present embodiment and other embodiments described above, a.c. driving methods of a field or frame reversal and a line reversal are described, the present invention can be applied to other known reversal driving methods such as a dot reversal and a source reversal.

[0112] Further, although, in the present embodiment and other embodiments described above, driving methods of a liquid crystal display device and the liquid crystal display device which uses the driving methods are described, the present invention can be applied to a liquid crystal display device with an auxiliary capacitance which is arranged so that a liquid crystal capacitance and the auxiliary capacitance are provided in parallel, and to a liquid crystal display device of IPS mode which is arranged so that a counter electrode is provided on the matrix substrate on which a TFT is provided. Further, a display device is not restricted to an active matrix liquid crystal display device, but may be an EL (Electro Luminescence) display device. Further, the foregoing display device can be provided in a cellular phone, a pocket game machine, a PDA (Personal Digital Assistants), a portable TV, a remote control, a note type personal computer, and other portable terminals. These portable terminals are driven almost by a battery. Thus, it is possible to drive the portable terminals in a long time by including the display device which can reduce power consumption with the quality of display kept good.

[0113] Further, in the present embodiment and other embodiments described above, after a scanning period in which applying is performed in the display cells 13 of one screen, a state of a voltage in the respective display cells 13 may be kept in a non-scanning period which is longer than the scanning period. By this, a scanning is not performed in the non-scanning period, so that it is possible to cease driving-related circuits. Therefore, it is possible to reduce power consumption. Further, when a period in which the display cell 13 maintains a voltage is long, an imbalance of the stored voltage occurs between positive and negative polarities due to a leak characteristic of the TFT etc. In order solve the problem, levels (in a case of a.c., mean potential of an amplitude) of the common voltage V_{com} and the common voltage $V_{com}(AC)$ or the signal voltages V_{sp} and V_{sn} and the

sours signal Vs are varied as described above, so that it is possible to avoid the occurrence of such an imbalance.

[structure of the liquid crystal display device]

[0114] Here, the following is a structure example of a common liquid crystal display device in the respective embodiments described above. The description is based on FIG. 17 and FIG. 18. Here, a reflecting liquid crystal display device which includes an auxiliary capacitance provided in parallel with a liquid crystal capacitance is described as an example.

[0115] FIG. 17 is a cross sectional view of a structure of a liquid crystal panel 1. The cross sectional view of FIG. 17 is a view which is seen from a sectional line C - C of FIG. 18. The liquid crystal panel 1 is a reflecting active matrix type liquid crystal display device, and has a basic structure in which a liquid crystal 17 such as a nematic liquid crystal is provided between the matrix substrate 11 and the facing substrate 12, and the TFTs 14 are formed on the matrix substrate 11 as an active element. Note that, although the TFT is used as an active element in the present embodiment, an MIM (Metal Insulator Metal) or an active element other than the TFT can be used. A phase difference plate 41, a polarizing plate 42, and an antireflection film 43 are provided on a top face of the facing substrate 12 in this order so as to control a state of incident light. A color filter 44 of RGB, and the transparent counter electrode 16 are provided in this order on the underside of the facing substrate 12. Due to the color filter 44, color display is possible.

[0116] In each TFT 14, a portion of the scanning line which is provided on the matrix substrate 11 functions as a gate electrode 45, and a gate insulating film 46 is formed on the gate electrode 45. An i type amorphous silicon layer 47 is formed so that it faces the gate electrode 45 with the gate insulating film 46 provided therebetween, and two n⁺ type amorphous silicon layers 48 are formed so that the two n⁺ type amorphous silicon layers 48 faces each other with a channel area of the i type amorphous silicon layer 47 being therebetween. A data electrode 49 which is a portion of a signal line is formed on the top face of one n⁺ type amorphous silicon layer 48, and a drain electrode 50 is formed so that it is taken from the top face of the other n⁺ type amorphous silicon layer 48 to the top face of a flat portion of the gate insulating film 46. A portion where the drain electrode 50 is taken to an upper side of the gate insulating film 46, as shown in FIG. 18, is connected to a rectangular auxiliary capacitance electrode pad 15a which faces a auxiliary capacitance wiring 53. A layer insulating film 51 is formed on the top face of the TFTs 14, and reflecting electrodes 15b are provided on the top face of the layer insulating film 51. The reflecting electrodes 15b are reflecting members for performing reflecting display by using surrounding light. Minute irregularities are formed on a surface of the layer insulating film 51 so as

to control a direction of reflected light of the reflecting electrodes 15b.

[0117] Further, respective reflecting electrodes 15b are conducted via contact holes 52 provided on the layer insulating film 51 to the drain electrode 50. That is, a voltage which is applied by the data electrode 49 and is controlled by the TFT 14 is applied from the drain electrode 50 via the contact hole 52 to the display electrode 15, and the liquid crystal 17 is driven by a voltage between the reflecting electrode 15b and the counter electrode 16. The auxiliary capacitance electrode pad 15a and the reflecting electrode 15b are conducted to each other, the liquid crystal 17 exists between the reflecting electrode 15b and the counter electrode 16. In this way, the auxiliary capacitance electrode pad 15a and the reflecting electrode 15b make up the display electrode 15. In a case of a transmitting liquid crystal display device, transparent electrodes which are provided so that they correspond to the foregoing electrodes are used as picture elements electrodes.

[0118] Further, in the liquid crystal panel 2, as shown in FIG. 18 which is a top view of a lower portion with respect to the liquid crystal 17 of FIG. 17, scanning lines G(j) which supply a scanning signal to the gate 45 of the TFT 14 and signal lines S(i) which supply a data signal to the data electrode 49 of the TFT 14 are provided so that they cross at right angle on the matrix substrate 11. Further, auxiliary capacitance wirings 53 are provided as auxiliary capacitance electrodes which form auxiliary capacities of picture elements between respective auxiliary capacitance electrode pads 15a. The auxiliary capacitance wirings 53 are provided in parallel with the scanning lines G(j) on the matrix substrate 11 so that the auxiliary capacitance wiring 53 faces the auxiliary capacitance electrode pad 15a with the gate insulating film 46 provided therebetween. As long as the auxiliary capacitance wirings 53 are provided away from the scanning lines G(j), the auxiliary capacitance may be arranged in other manners. Note that, a portion of the reflecting electrodes 15b is omitted so as to clarify the positioning relation between the auxiliary capacitance electrode pads 15a and the auxiliary capacitance wirings 53 in FIG. 18. Further, the irregularities formed on the surface of the layer insulating film 51 of FIG. 17 are not shown in FIG. 18.

[0119] In the reflecting active matrix type liquid crystal display device as described above, back light which consumes extremely much power is not required. Thus, even when a high-speed refresh display mode which can realize an animation display and a low-speed refresh mode which is to save power are switched as required in the reflecting active matrix type liquid crystal display device used suitably in portable data terminals including a cellular phone, so that it is possible to largely reduce the flicker which is likely to occur in the liquid crystal display device.

[0120] Further, the active matrix type display device and its driving method of the present invention may be

arranged so that voltage switching means corresponding to an applying-storing period is provided, and voltage setting means for setting d.c. voltage is provided, and a current flows in only the selected voltage setting means. Arranged in this way, a current does not flow in the voltage setting means which is not selected. Thus, power is not consumed by resistance of the voltage setting means.

[0121] Further, in the display device and the driving method, a.c. voltage is used as the common voltage or the signal voltage, and a mean potential of an amplitude of the a.c. voltage may be varied as the level in every applying-storing period of a different length. When the common voltage or the signal voltage is a.c. in this way, an effective value of a driving voltage is changed also by varying the mean potential of an amplitude (level). Alternatively, a.c. voltage may be used as the common voltage, and amplitude of the a.c. voltage may be varied by the amplitude varying means in every applying-storing period of a different length. In this way, the effective value of the driving voltage is changed also by varying amplitude of the common voltage of a.c., and amplitude is set to be comparatively large when the applying-storing period is long, so that it is possible to compensate a drop of the stored driving voltage. The drop of the stored driving voltage is brought about by a leak of a charge from the storage capacitor due to an operation characteristic of the active element. Thus, it is possible to obtain an effect that the quality of a displayed image can be improved.

[0122] When the signal voltage is varied, the level may be varied with respect to only one of the polarities of the signal voltage which are reversed to the other polarity in every adjacent applying-storing period, and the level may be varied with respect to the both polarities of the signal voltage.

[0123] In the driving method, after the scanning period in which the signal voltage is applied to the display electrode of one screen, it is preferable that a non-scanning period, longer than the scanning period, in which the signal voltage is not applied. By this, the scanning is not performed in the non-scanning period, so that it is possible to cease a driving-related circuit. Therefore, it is possible to reduce power consumption. Further, when a period in which the storage capacitor maintains a voltage is long, an imbalance of the stored voltage occurs between positive and negative polarities due to a leak characteristic of the TFT etc. In order to solve the problem, the common voltage or the level of the signal voltage is varied, so that it is possible to avoid the occurrence of such an imbalance.

[0124] In the driving method, it is preferable that the active matrix type display device is a reflecting active matrix type liquid crystal display device including a reflecting electrode in the display electrode. Thus, even when a high-speed refresh display mode which can realize an animation display and a low-speed refresh mode which is to save power are switched as required

in the reflecting active matrix type liquid crystal display device used suitably in portable data terminals including a cellular phone, it is possible to largely reduce the flicker which is likely to occur in the liquid crystal display device.

[0125] The invention being thus described, it will be obvious that the same way may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.

Claims

1. A driving method of an active matrix type display device which includes plural display electrodes(15) provided in a matrix manner, a counter electrode (16) which is provided so that the counter electrode (16) faces the display electrodes(15) and a common voltage is applied to the counter electrode (16), an active element(14) for applying a signal voltage to the display electrodes(15) when a scanning line (G(j)) is selected, a storage capacitor (CLC) for storing a driving voltage which is determined by the signal voltage applied to the display electrodes(15) and the common voltage applied to the counter electrode(16), wherein
a level of the common voltage is varied according to a length of an applying-storing period for applying the signal voltage and storing the driving voltage.
2. The driving method of the active matrix type display device set forth in claim 1, wherein plural d.c. voltages are used as the common voltage so as to switch the d.c. voltages in every applying-storing period of a different length.
3. The driving method of the active matrix type display device set forth in claim 1, wherein an a.c. voltage is used as the common voltage so as to vary a level of a mean potential of an amplitude of the a.c. voltage in every applying-storing period of a different length.
4. The driving method of the active matrix type display device set forth in claim 1 or claim 3, wherein an a.c. voltage is used as the common voltage so as to vary an amplitude of the a.c. voltage in every applying-storing period of a different length.
5. A driving method of an active matrix type display device which includes plural display electrodes(15) provided in a matrix manner, a counter electrode (16) which is provided so that the counter electrode (16) faces the display electrodes(15) and a com-

mon voltage is applied to the counter electrode(16), an active element(14) for applying a signal voltage to the display electrodes(15) when a scanning line (G(j)) is selected, a storage capacitor(CLC) for storing a driving voltage which is determined by the signal voltage applied to the display electrodes(15) and the common voltage applied to the counter electrode(16), wherein

a level of the signal voltage is varied according to a length of an applying-storing period for applying the signal voltage and storing the driving voltage.

6. The driving method of the active matrix type display device set forth in claim 5, wherein plural d.c. voltages are used as the signal voltage so as to switch the d.c. voltages in every applying-storing period of a different length.

7. The driving method of the active matrix type display device set forth in claim 5, wherein a level of the signal voltage is varied with respect to only one of the polarities of the signal voltage which are reversed in every adjacent applying-storing period.

8. The driving method of the active matrix type display device set forth in claim 5, wherein a level of the signal voltage is varied with respect to both polarities of the signal voltage which are reversed in every adjacent applying-storing period.

9. The driving method of the active matrix type display device set forth in claim 5, wherein an a.c. voltage is used as the signal voltage so as to vary a level of a mean potential of an amplitude of the a.c. voltage in every applying-storing period of a different length.

10. The driving method of the active matrix type display device set forth in claim 5 or claim 9, wherein an a.c. voltage is used as the signal voltage so as to vary an amplitude of the a.c. voltage in every applying-storing period of a different length.

11. The driving method of the active matrix type display device set forth in any one of claim 1 to claim 10, wherein after a scanning period in which the signal voltage is applied to the display electrodes(15) of one screen, a non-scanning period, longer than the scanning period, in which the signal voltage is not applied is provided.

12. The driving method of the active matrix type display device set forth in any one of claim 1 to claim 11, wherein said active matrix type display device is a reflecting active matrix type display device including reflecting electrodes(15b) in the display electrodes (15).

13. An active matrix type display device comprising plural display electrodes(15) provided in a matrix manner; a counter electrode(16) which is provided so that the counter electrode(16) faces the display electrodes(15) and a common voltage is applied to the counter electrode(16); an active element (14) for applying a signal voltage to the display electrodes(15) when a scanning line(G(j)) is selected; a storage capacitor(CLC) for storing a driving voltage which is determined by the signal voltage applied to the display electrodes(15) and the common voltage applied to the counter electrode(16), wherein said active matrix type display device comprising:

level varying means(5, 22, 23) for varying a level of the common voltage according to a length of an applying-storing period in which the signal voltage is applied and the driving voltage is stored.

14. The active matrix type display device set forth in claim 13, wherein said level varying means(5) includes voltage switching means(5c, 5i) by which plural d.c. voltages as the common voltage are switched in every applying-storing period of a different length.

15. The active matrix type display device set forth in claim 13, wherein said level varying means(22, 23) varies a level of a mean potential of an amplitude of an a.c. voltage as the common voltage in every applying-storing period of a different length.

16. The active matrix type display device set forth in claim 13 or claim 15, wherein said level varying means(23) includes amplitude varying means(23f) which varies an amplitude of an a.c. voltage as the common voltage in every applying-storing period of a different length.

17. An active matrix type display device comprising plural display electrodes(15) provided in a matrix manner; a counter electrode(16) which is provided so that the counter electrode(16) faces the display electrodes(15) and a common voltage is applied to the counter electrode(16); an active element(14) for applying a signal voltage to the display electrodes (15) when a scanning line(G(j)) is selected; a storage capacitor(CLC) for storing a driving voltage which is determined by the signal voltage applied to the display electrodes(15) and the common voltage applied to the counter electrode, wherein said active matrix type display device comprising:

level varying means(7, 9, 21) for varying a level of the signal voltage according to a length of an applying-storing period in which the signal voltage is applied and the driving voltage is stored.

18. The active matrix type display device set forth in claim 17, wherein said level varying means(7) in-

cludes voltage varying means(7e, 7f, 7o, 7p) by which plural d.c. voltages as the signal voltage are switched in every applying-storing period of a different length.

5

19. The active matrix type display device set forth in claim 14 or claim 18, wherein said voltage switching means(5, 7) is provided so as to correspond itself to the applying-storing period, and includes voltage setting means (5a, 5b, 5e to 5h, 7r to 7u) for setting the d.c. voltages, and applies a current only to a selected voltage setting means. 10
20. The active matrix type display device set forth in claim 17, wherein said level varying means(7) varies a level of the signal voltage with respect to only one of the polarities of the signal voltage which are reversed in every adjacent applying-storing period. 15
21. The active matrix type display device set forth in claim 17, wherein said level varying means(9) varies a level of the signal voltage with respect to both polarities of the signal voltage which are reversed in every adjacent applying-storing period. 20
22. The active matrix type display device set forth in claim 17, wherein said level varying means(21) varies a level of a mean potential of an amplitude of an a.c. voltage as the signal voltage in every applying-storing period of a different length. 25 30
23. The active matrix type display device set forth in claim 17 or claim 22, wherein said level varying means(21) includes amplitude varying means(21g) which varies an amplitude of an a.c. voltage as the signal voltage in every applying-storing period of a different length. 35

40

45

50

55

FIG. 1

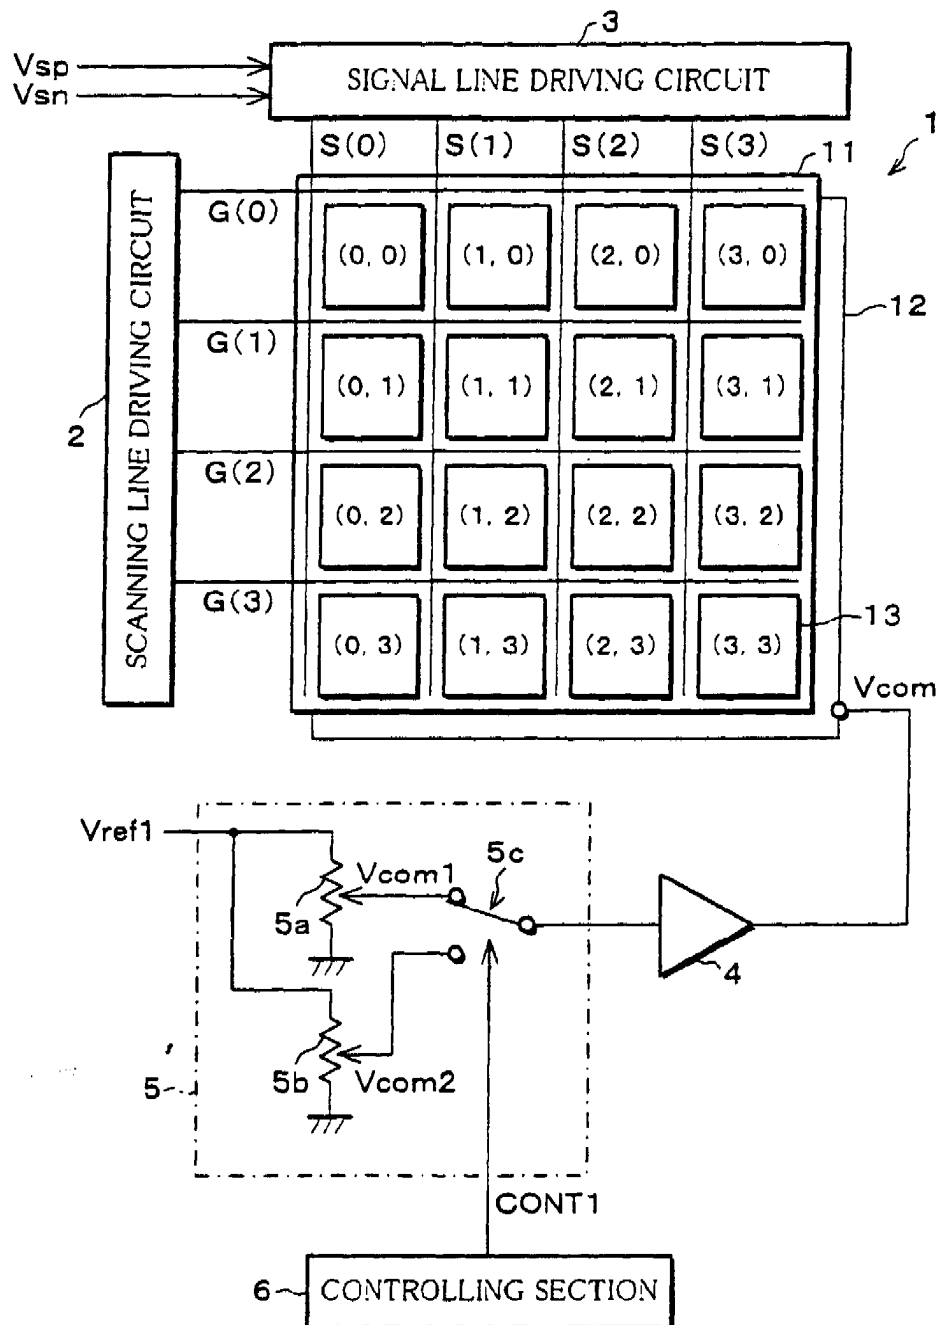


FIG. 2

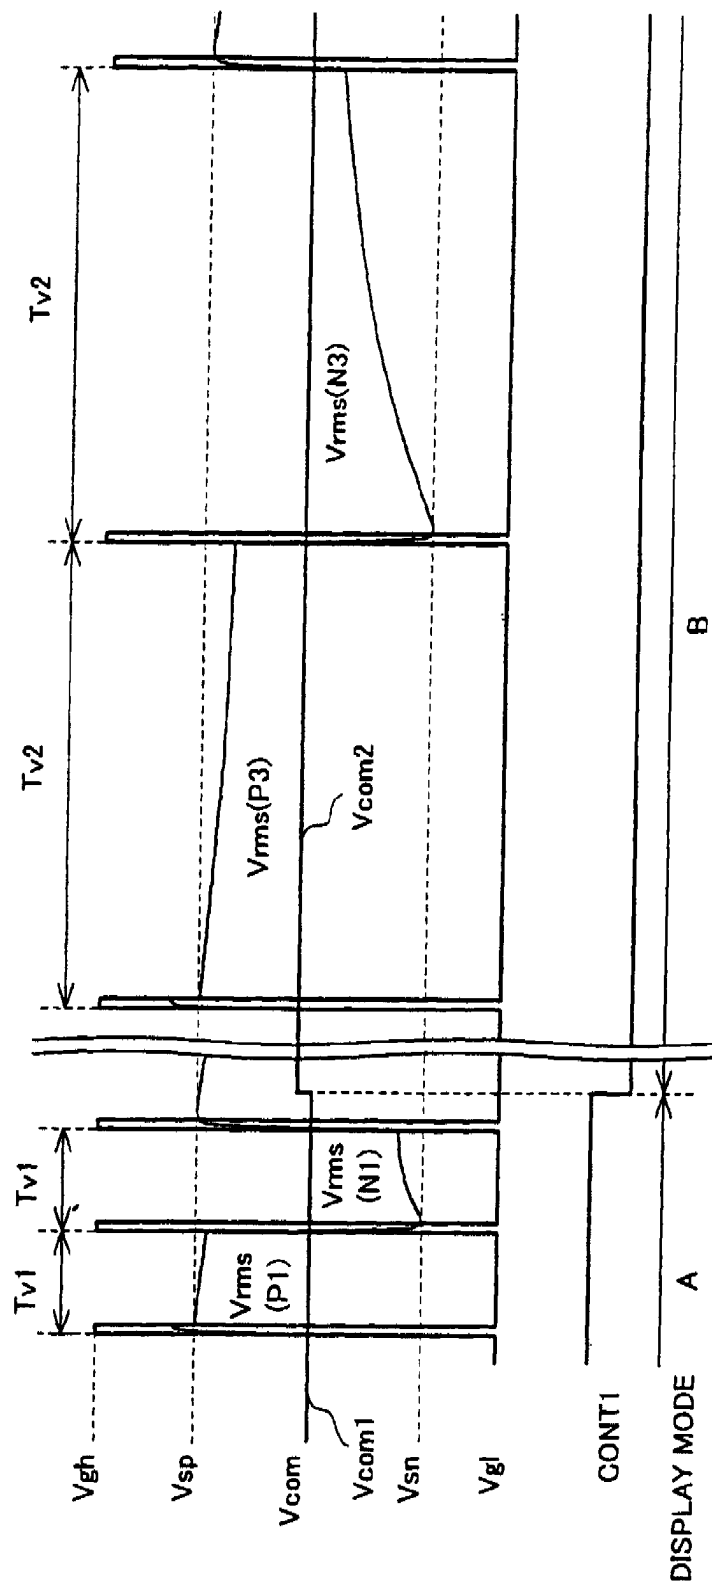


FIG. 3 (a)

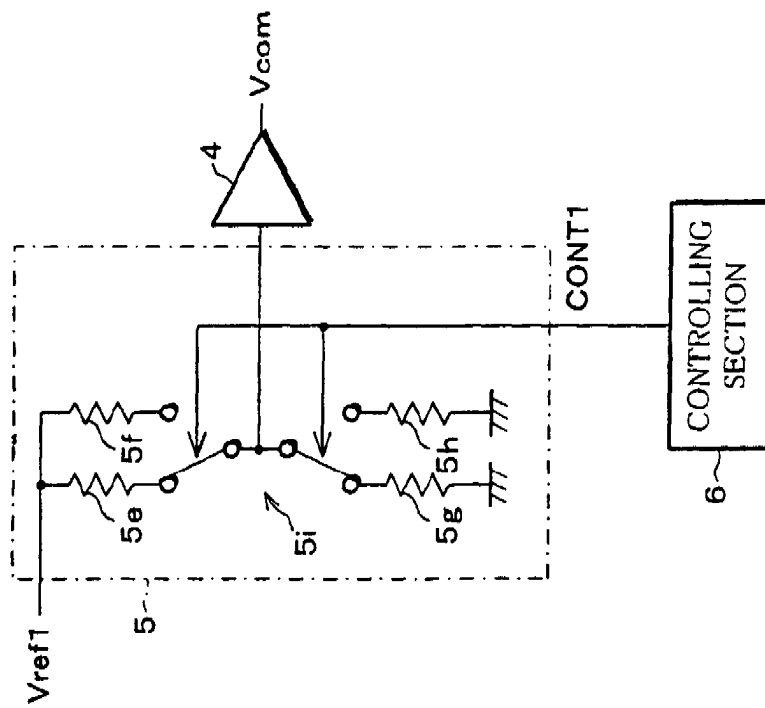


FIG. 3 (b)

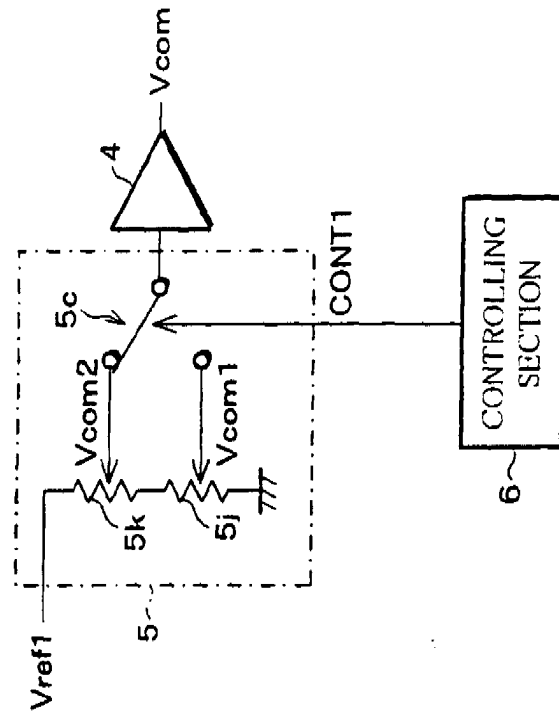


FIG. 4

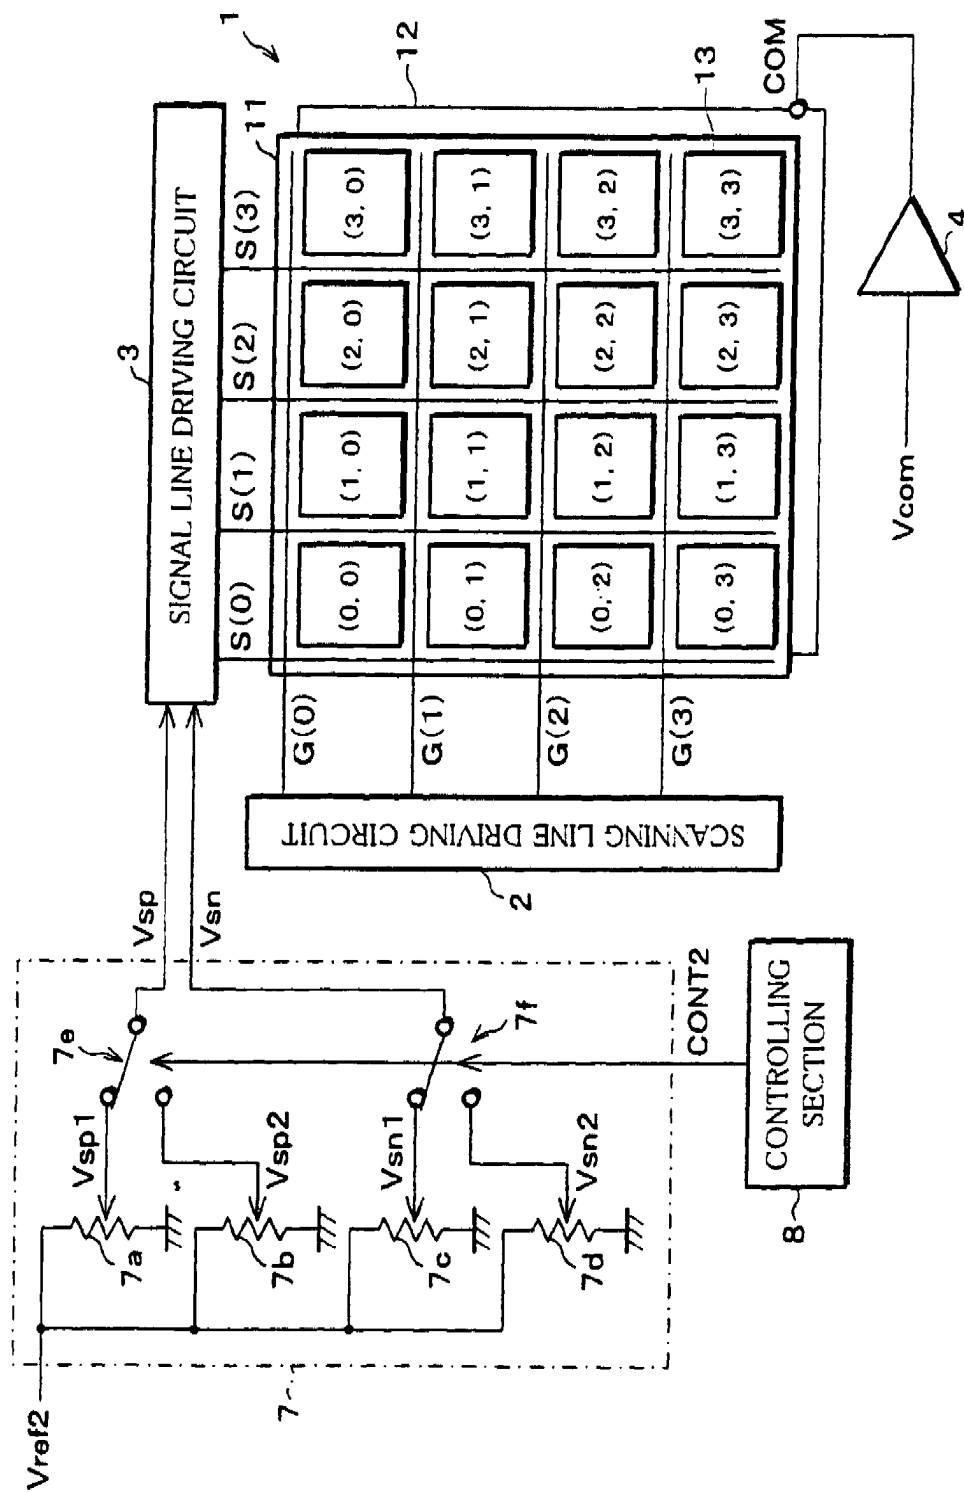


FIG. 5

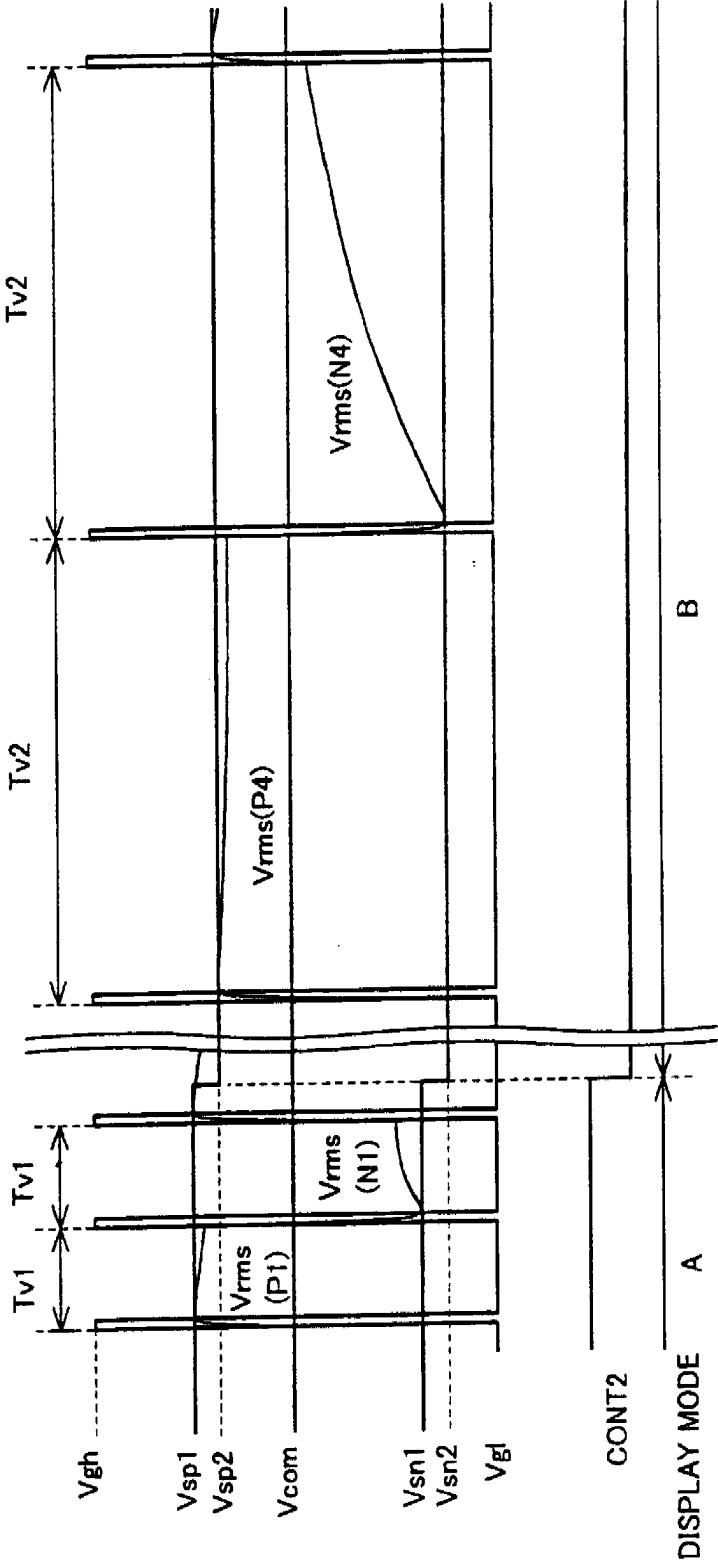


FIG. 6 (a)

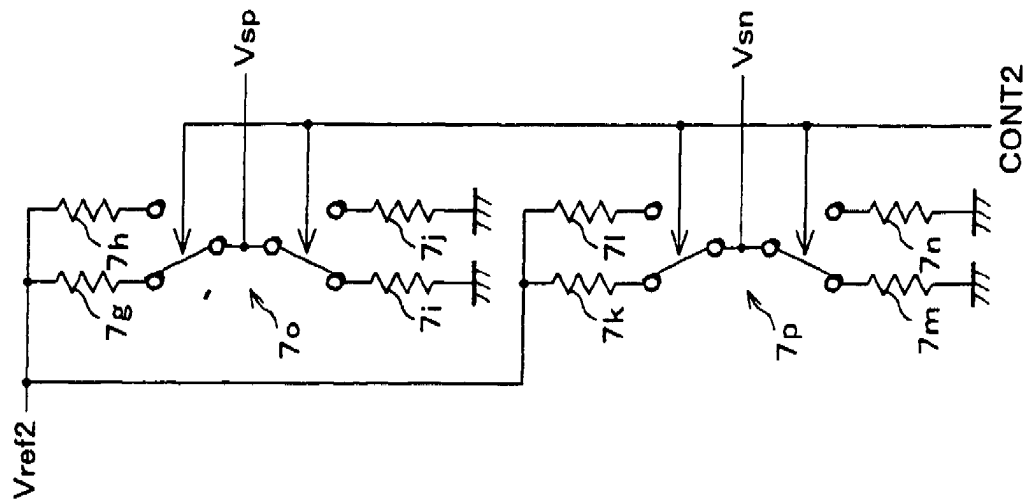


FIG. 6 (b)

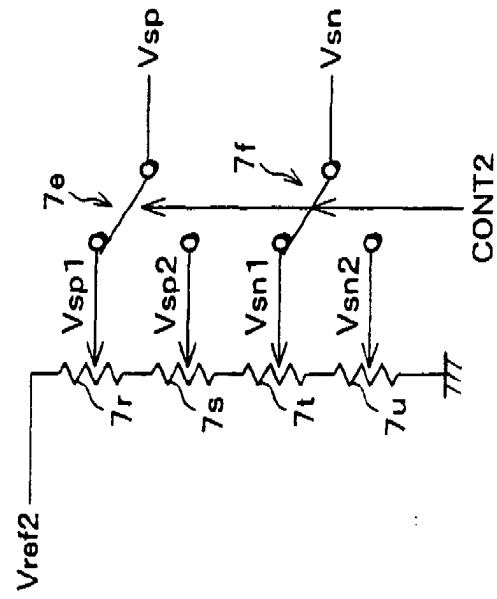


FIG. 7

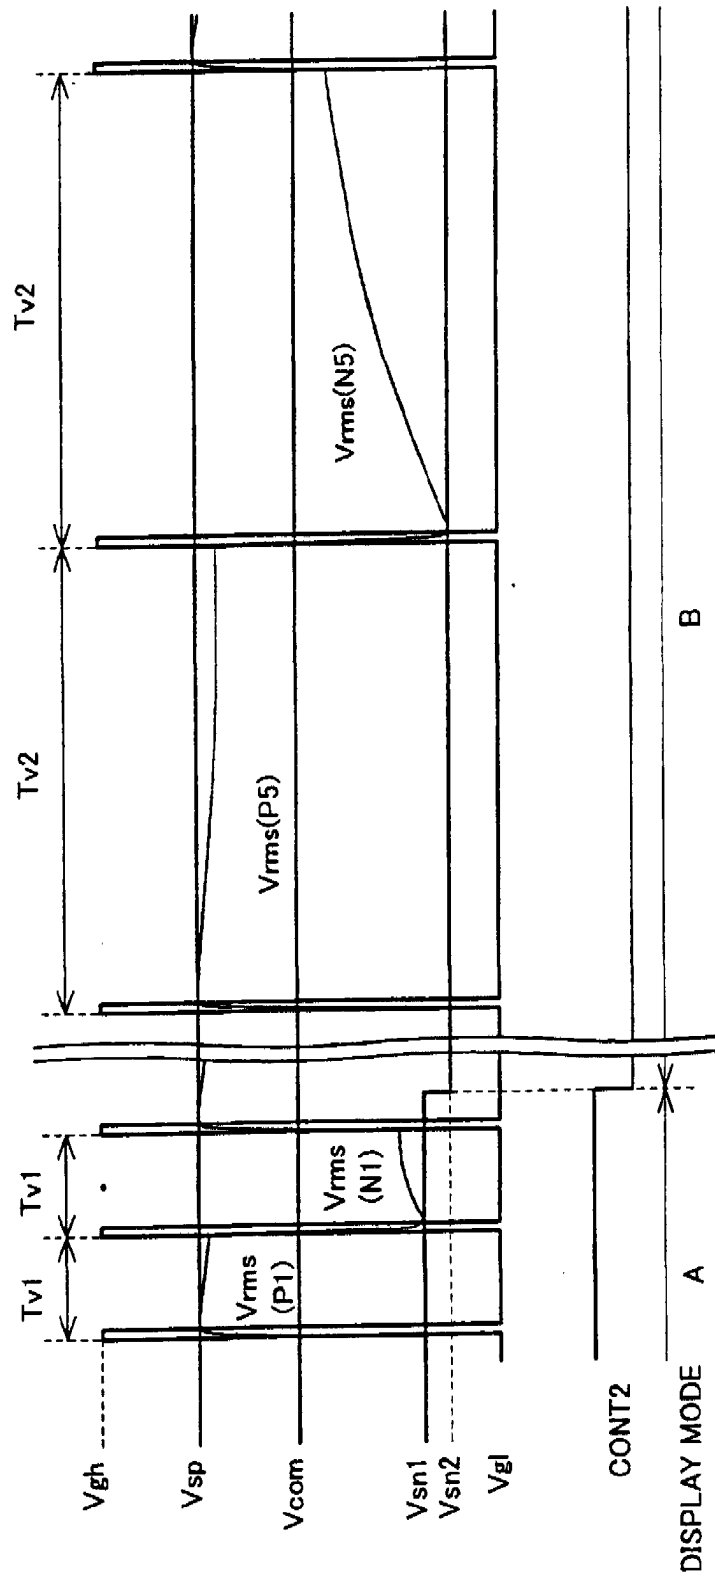


FIG. 8

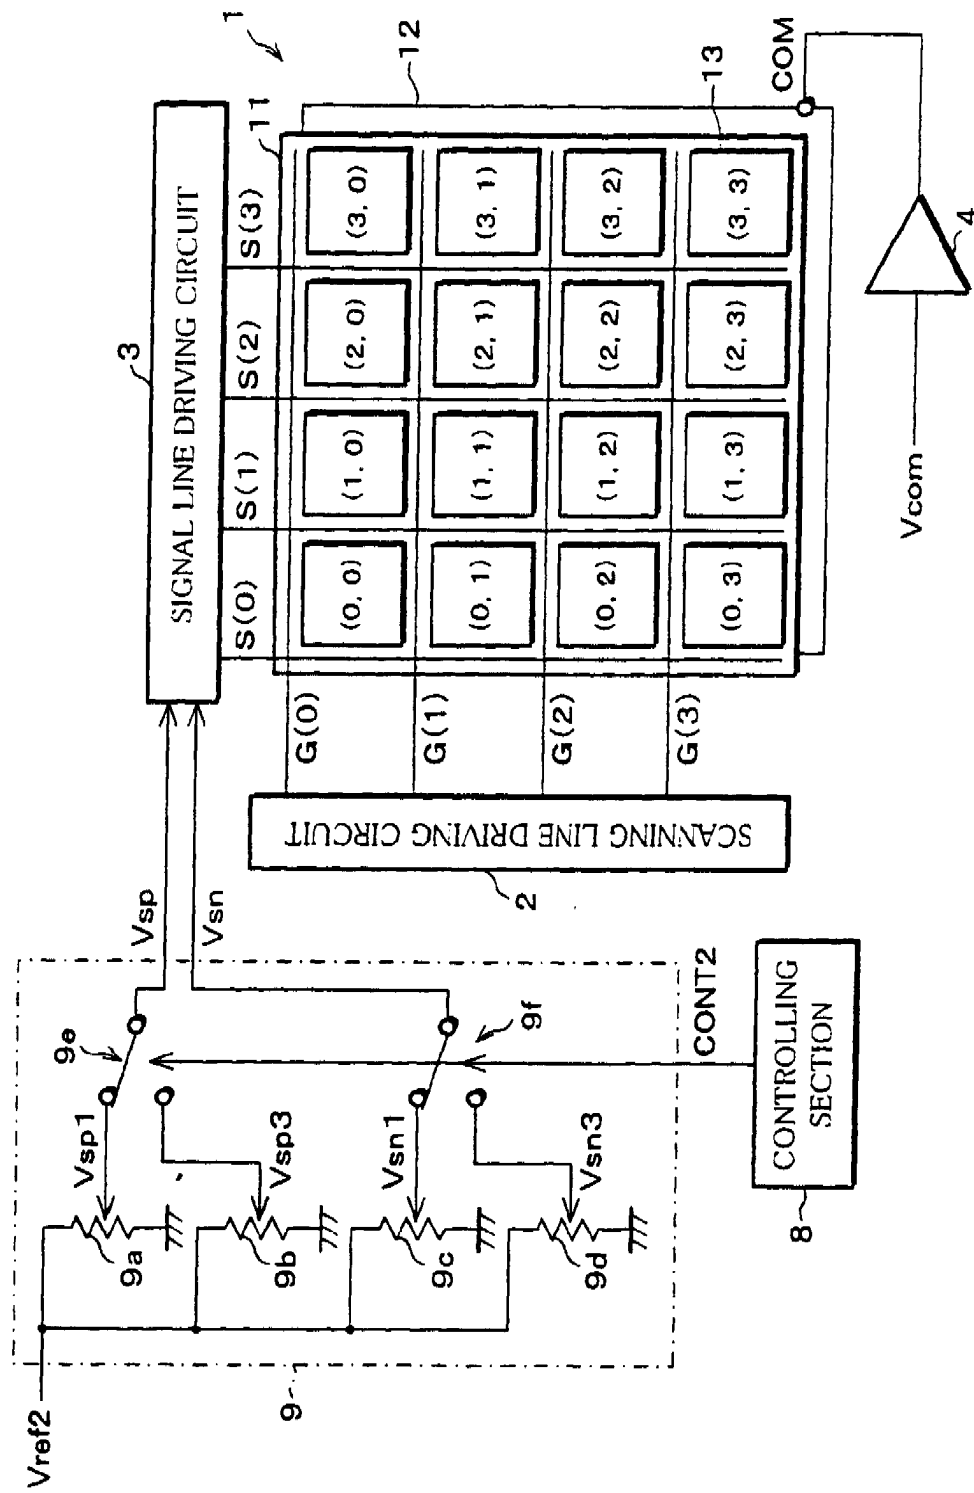


FIG. 9

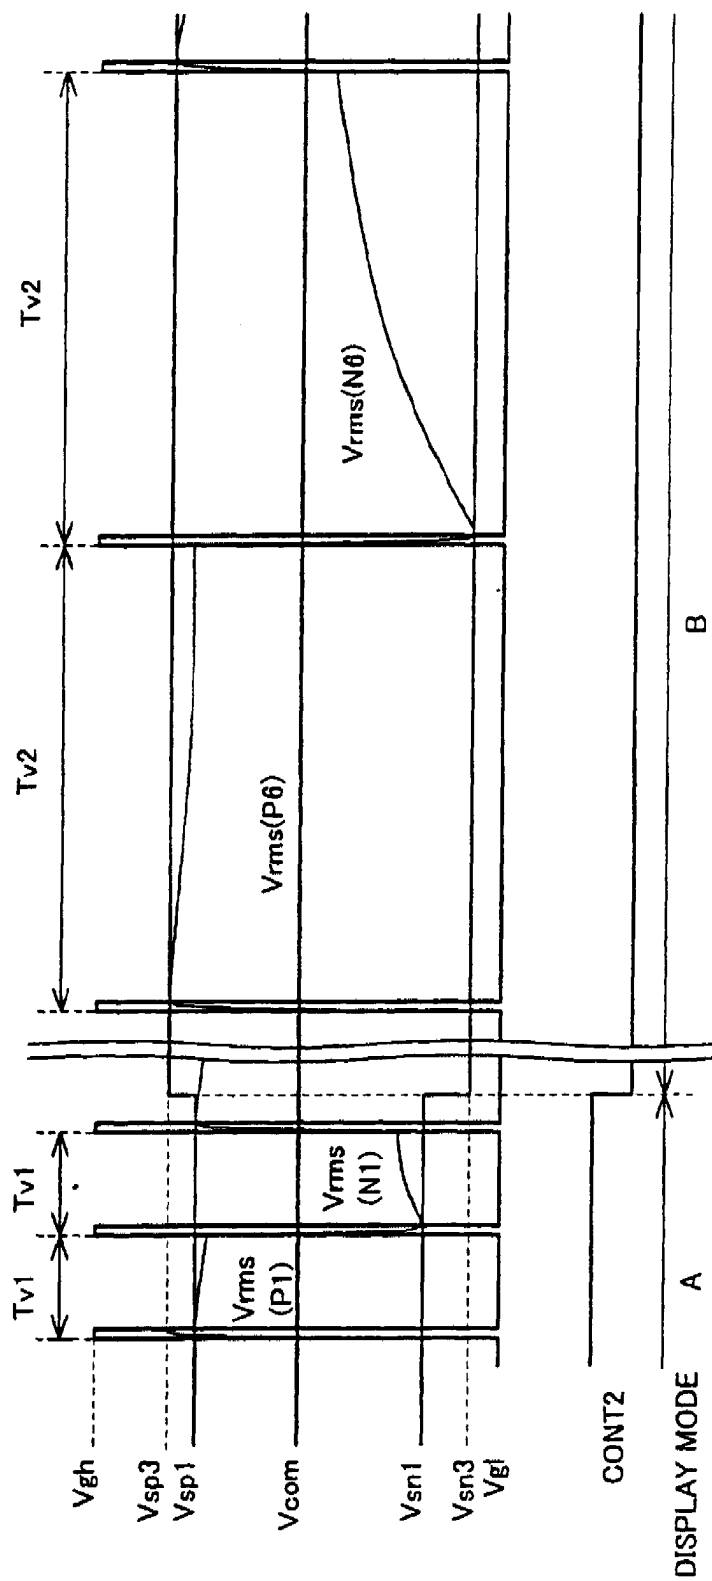


FIG. 10

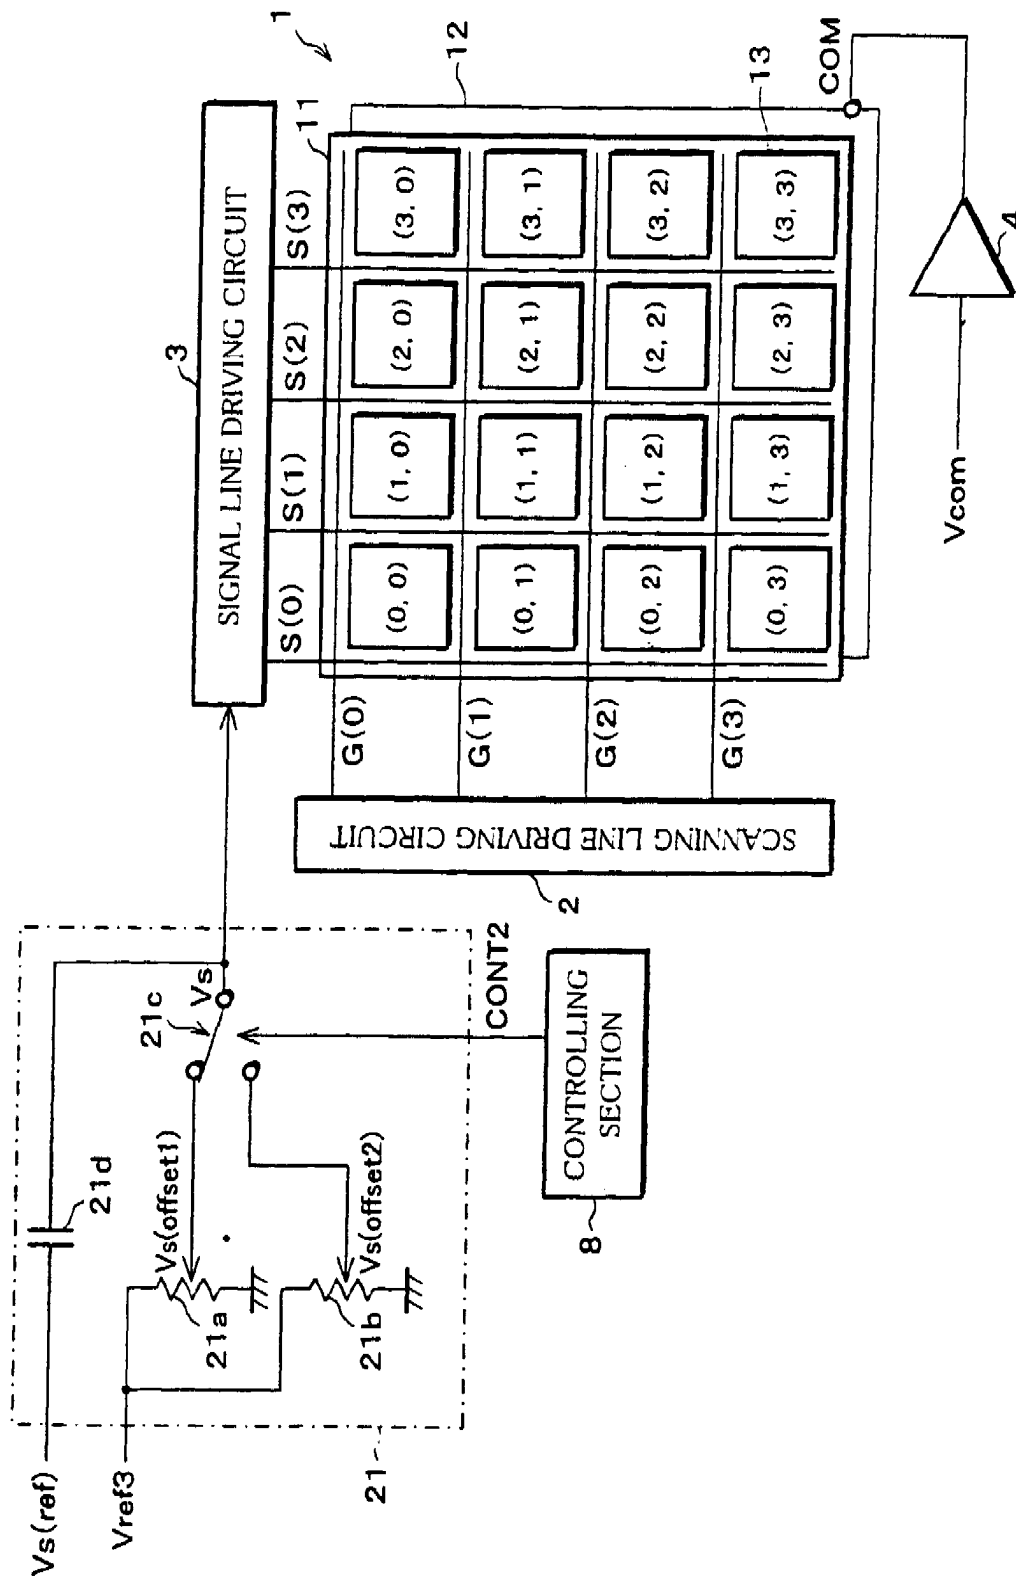


FIG. 11

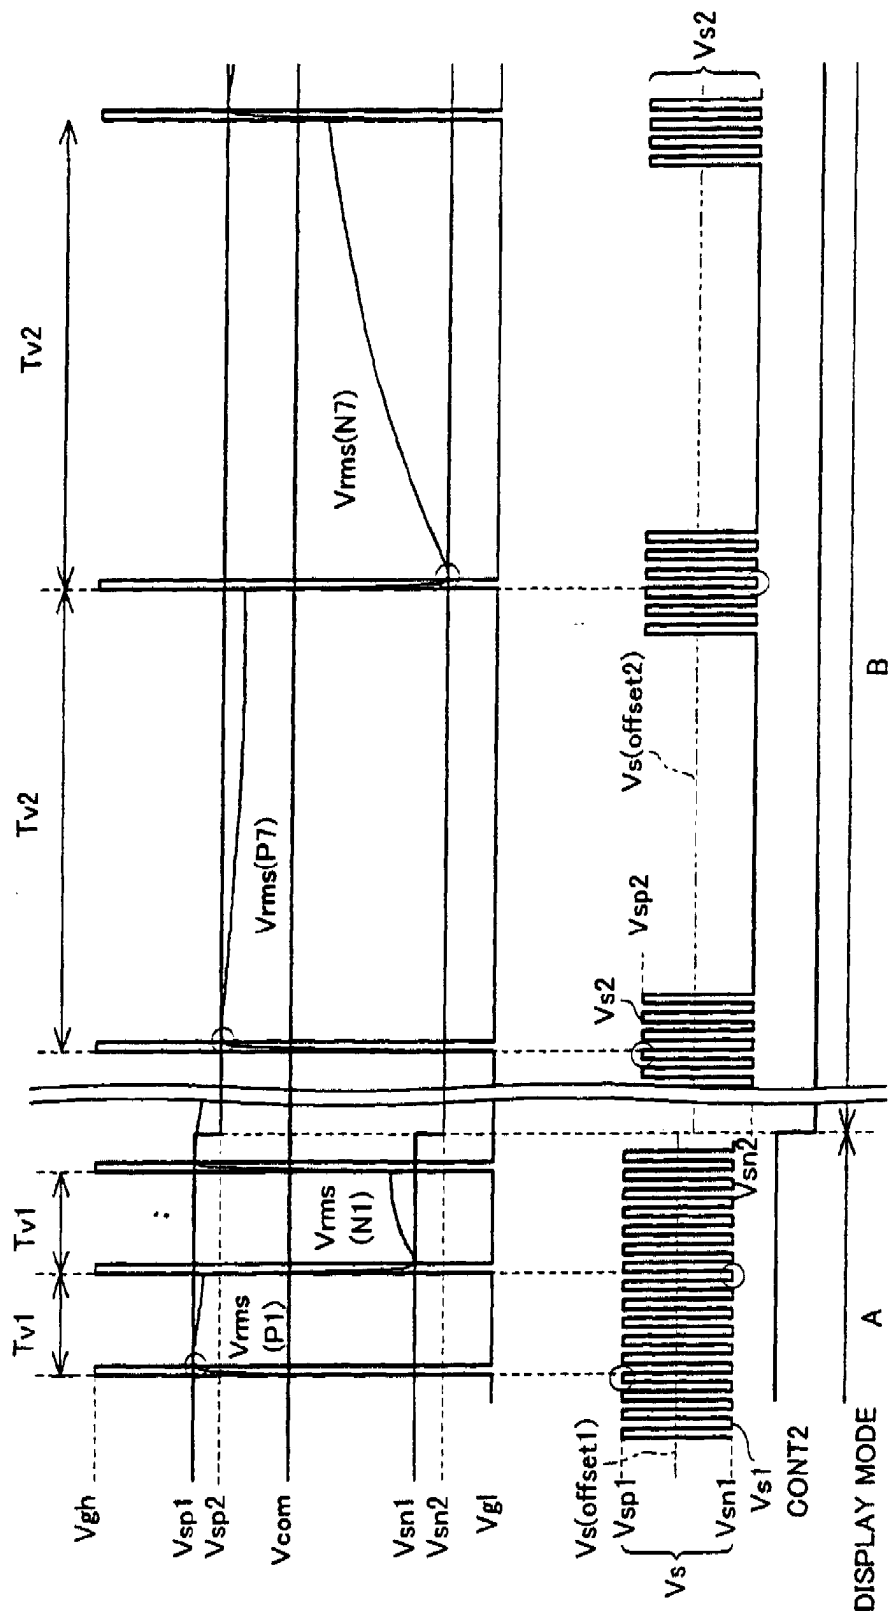


FIG. 12

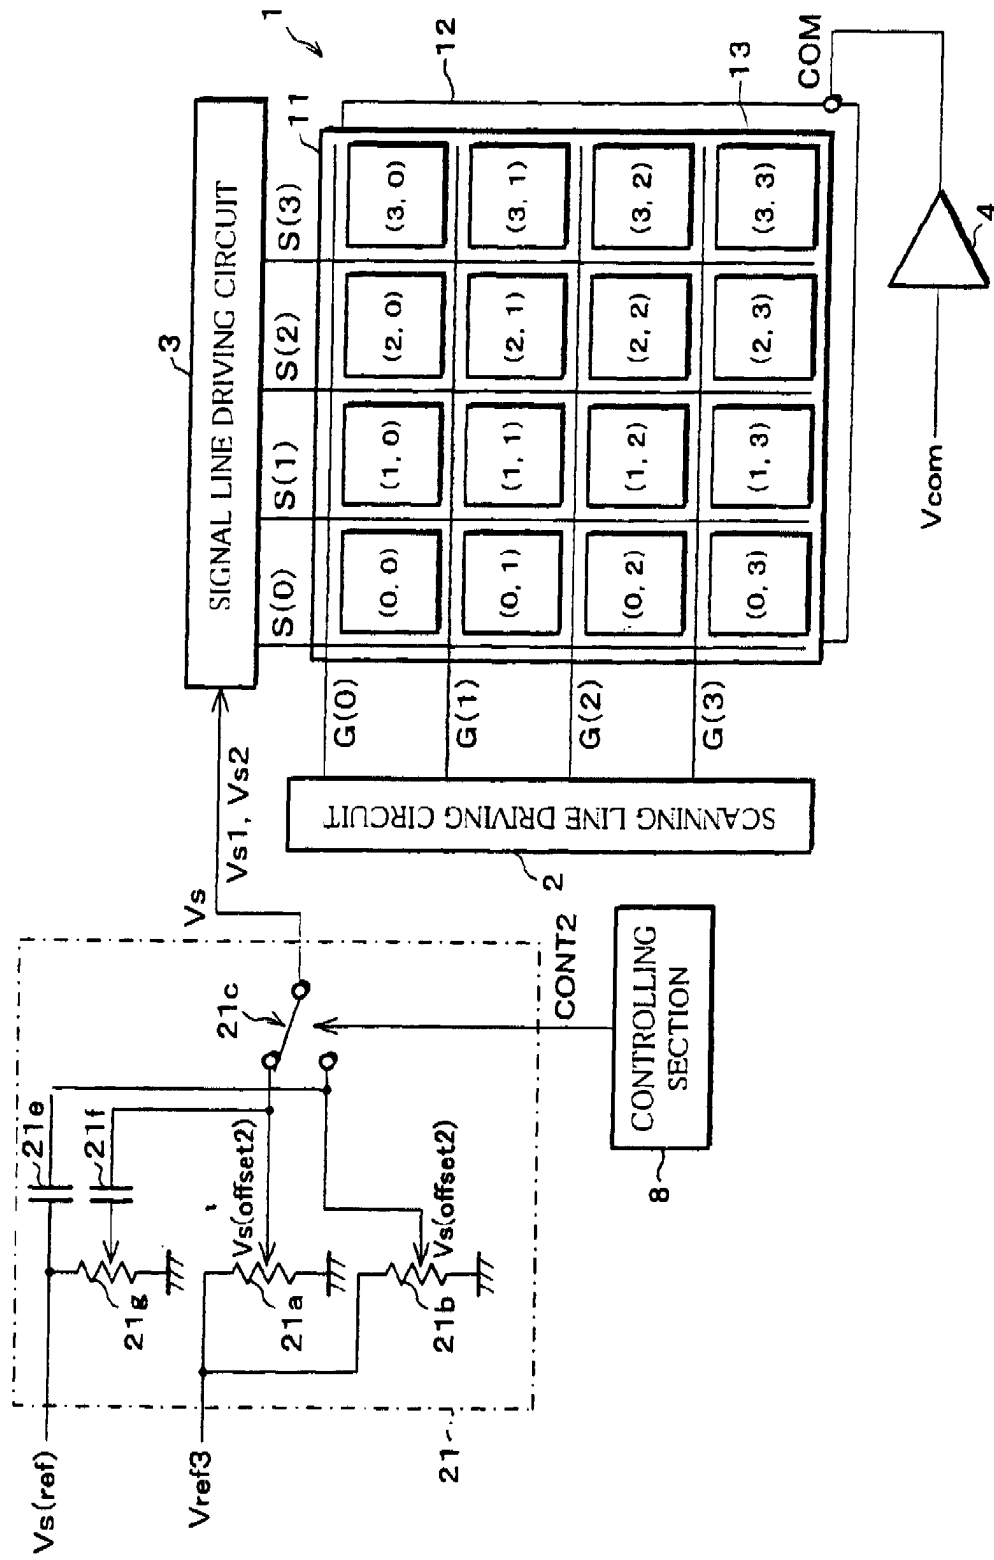


FIG. 13

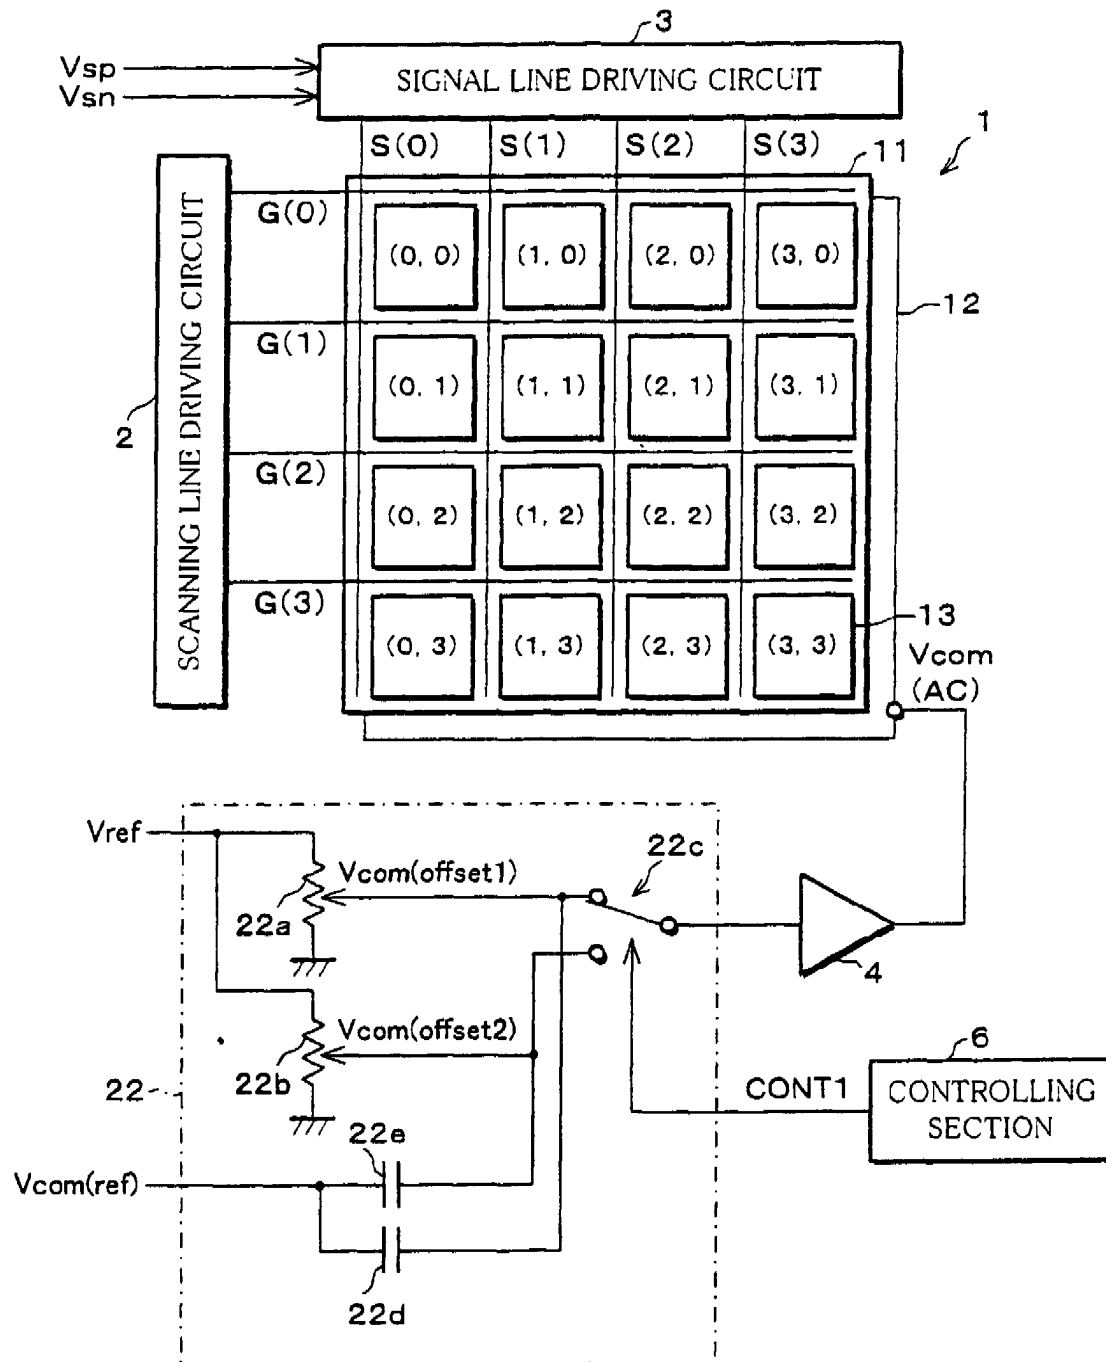


FIG. 14

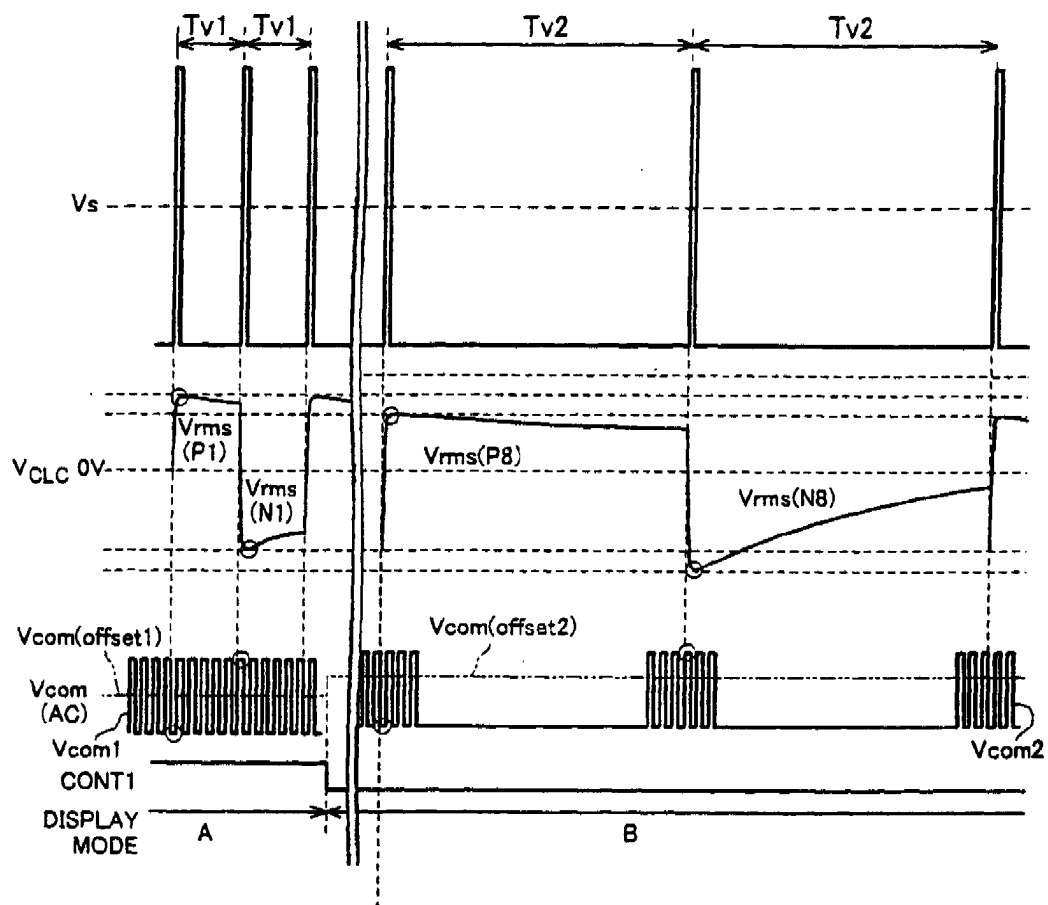


FIG. 15

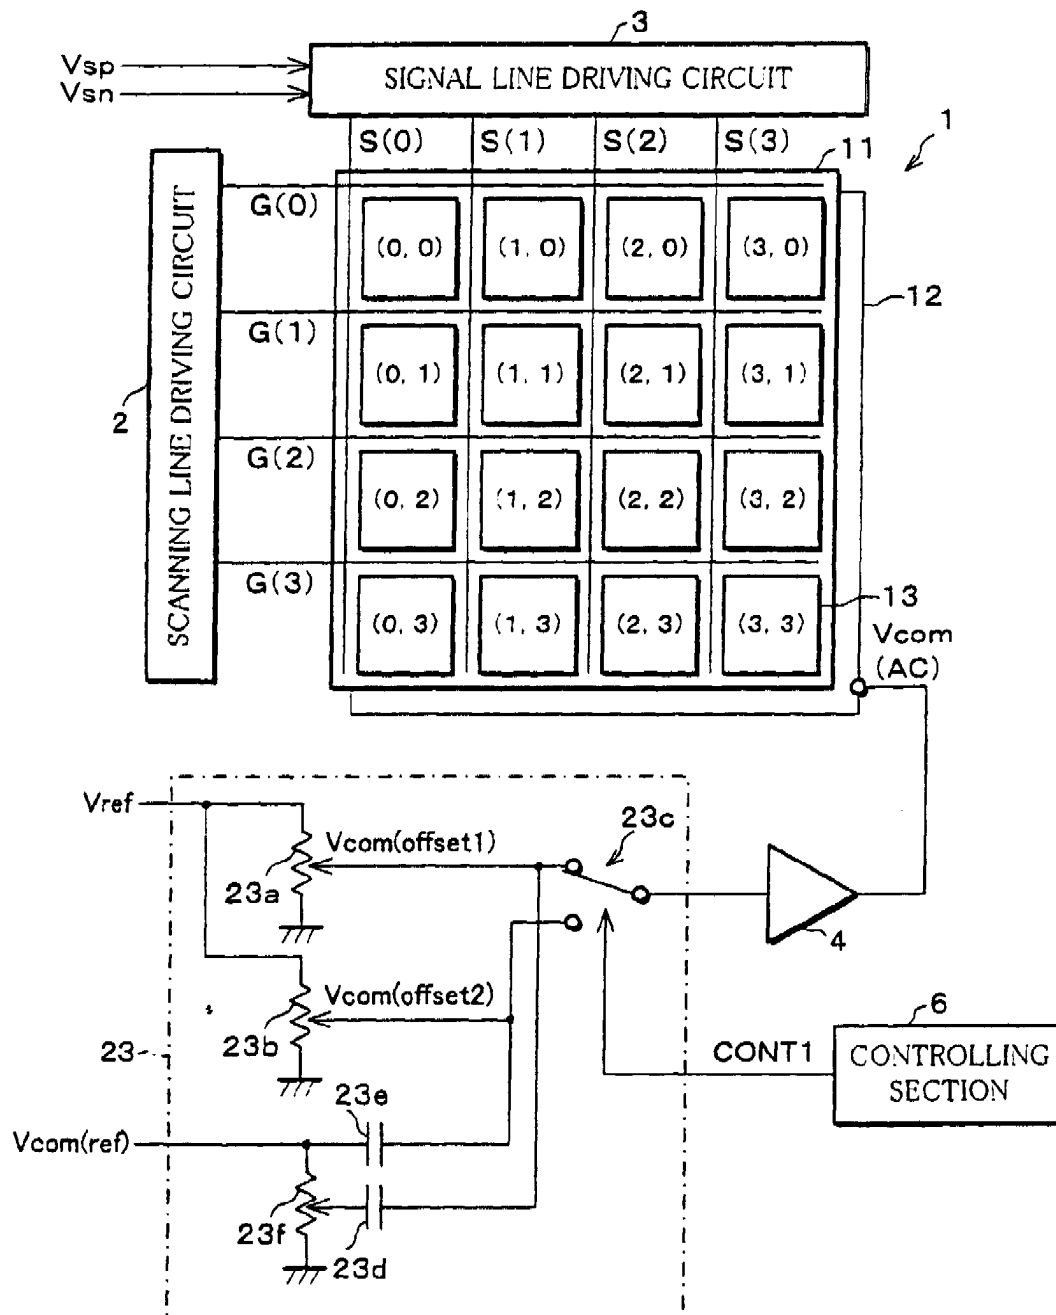


FIG. 16

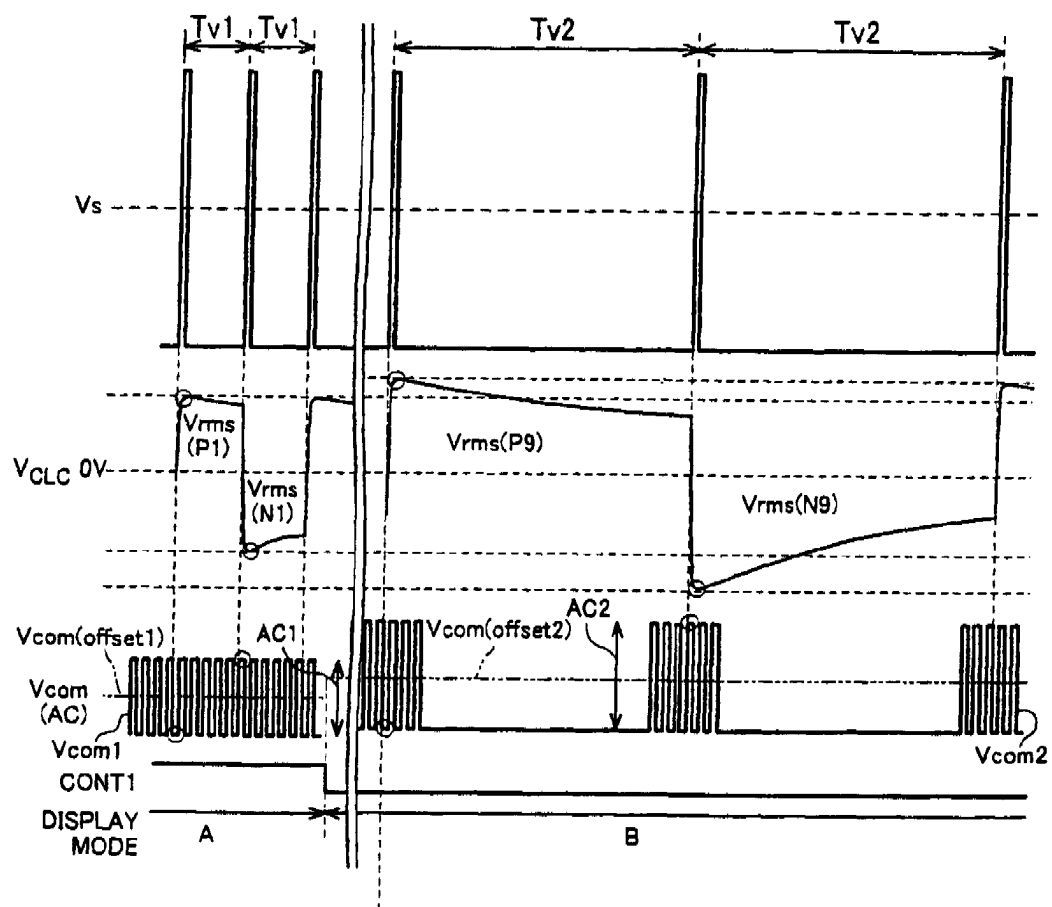


FIG. 17

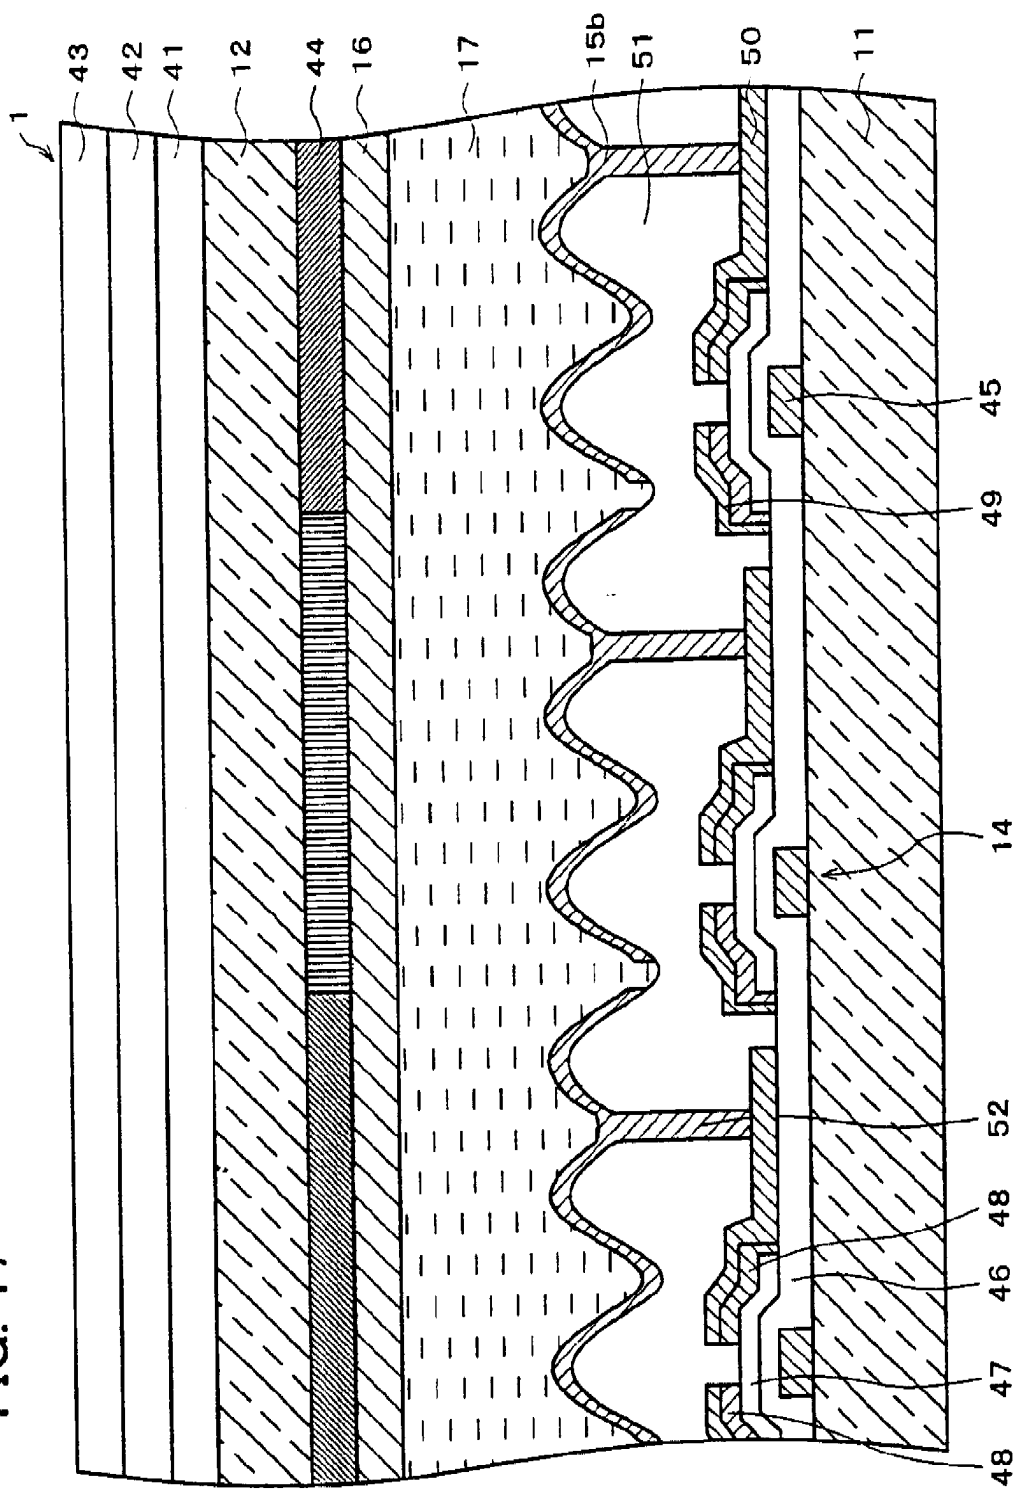


FIG. 18

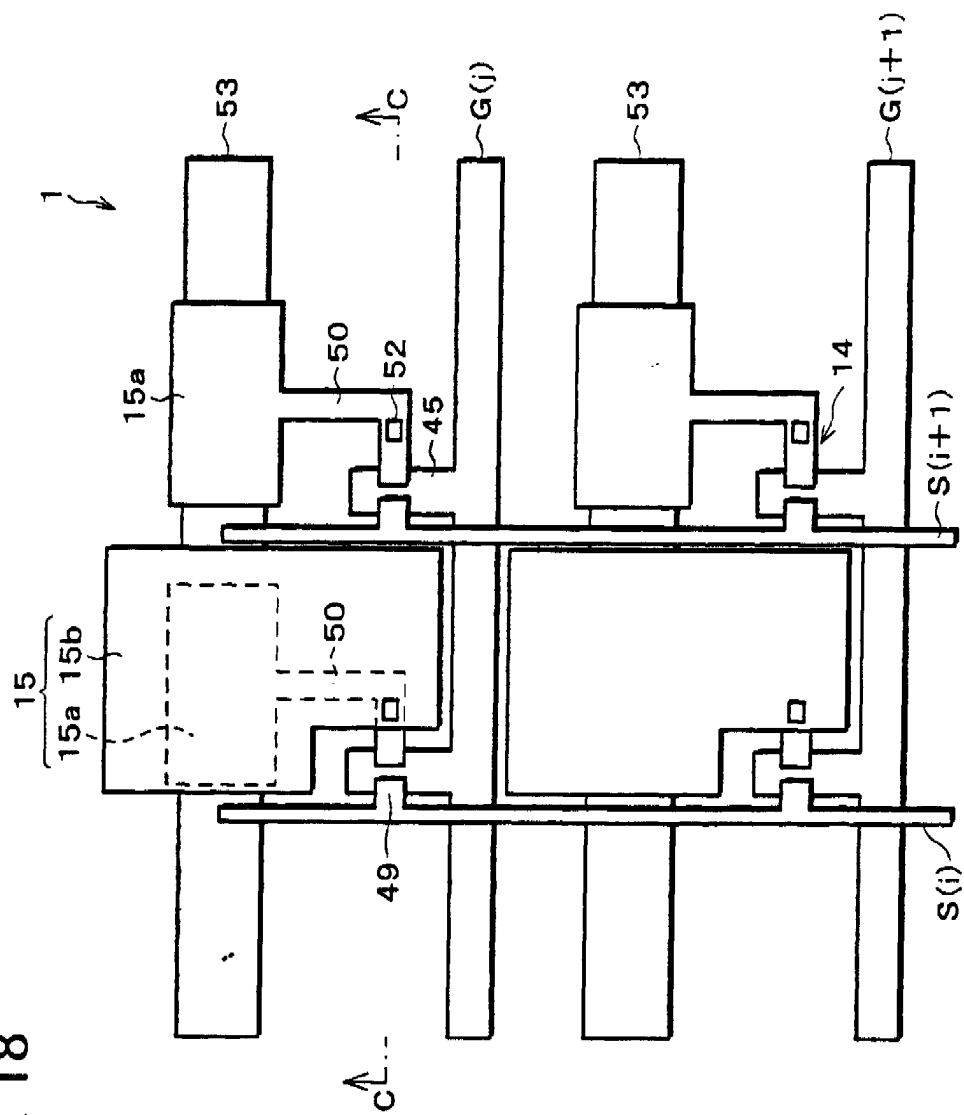


FIG. 19

PRIOR ART

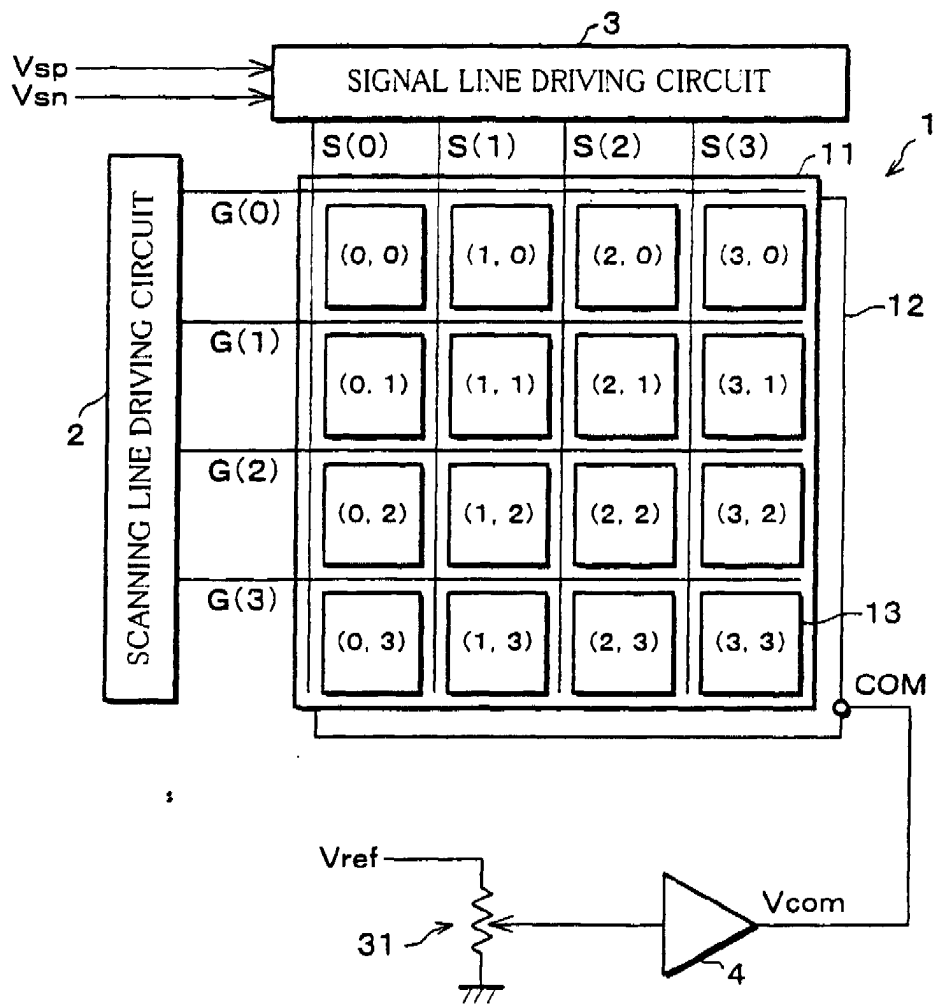


FIG. 20

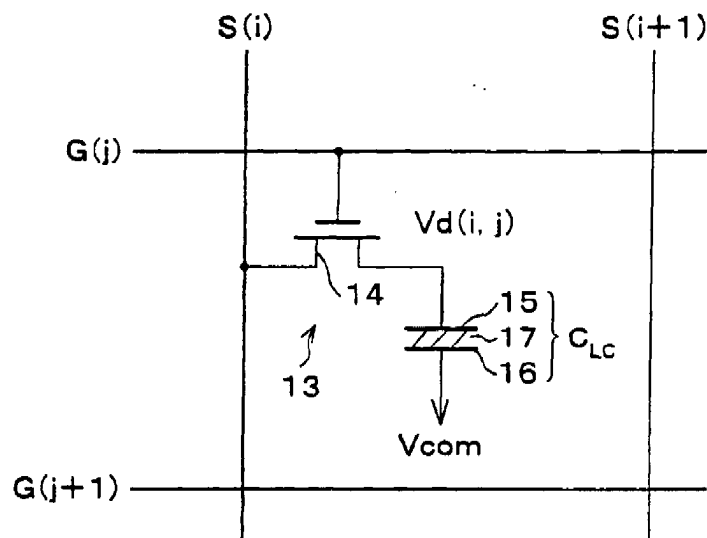


FIG. 21

PRIOR ART


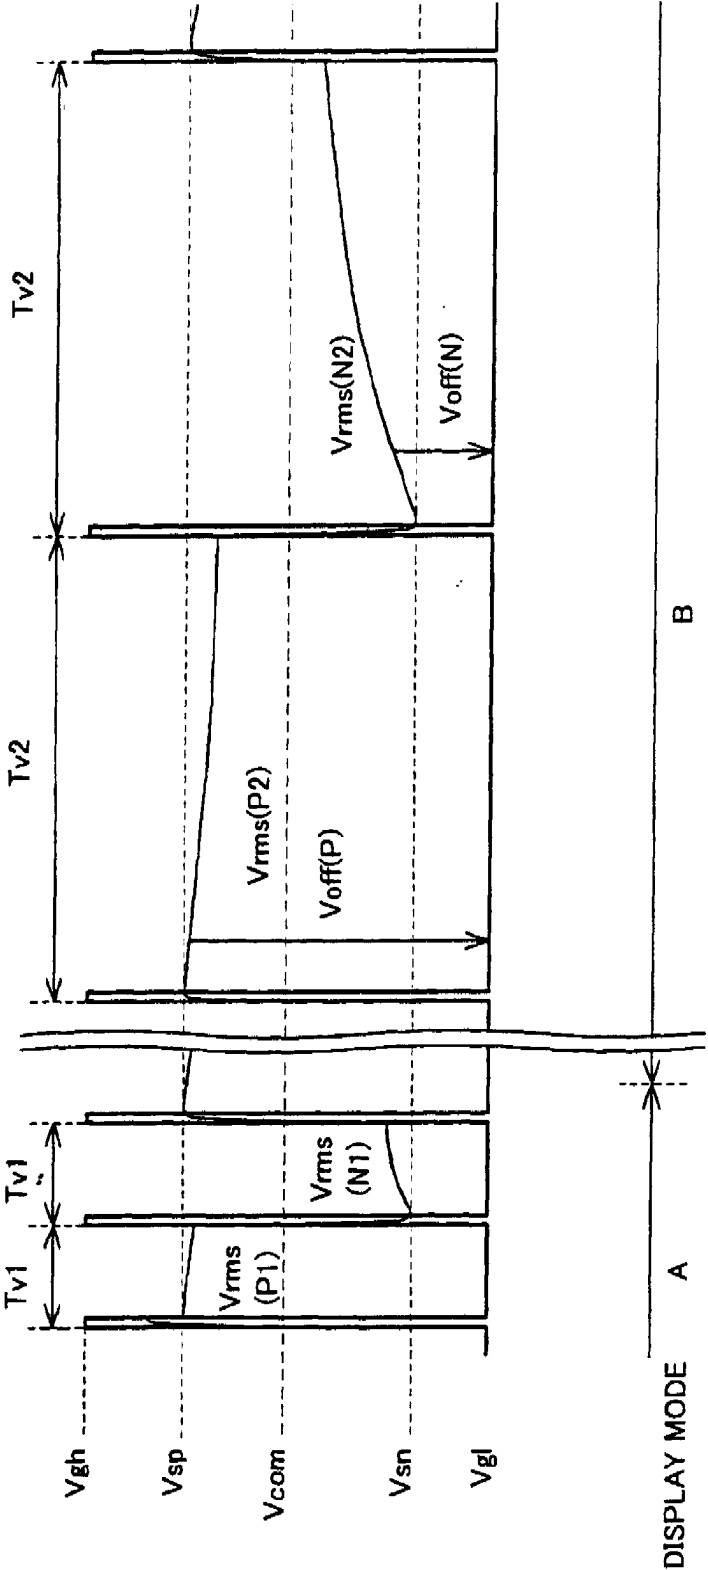


FIG. 22



(19)

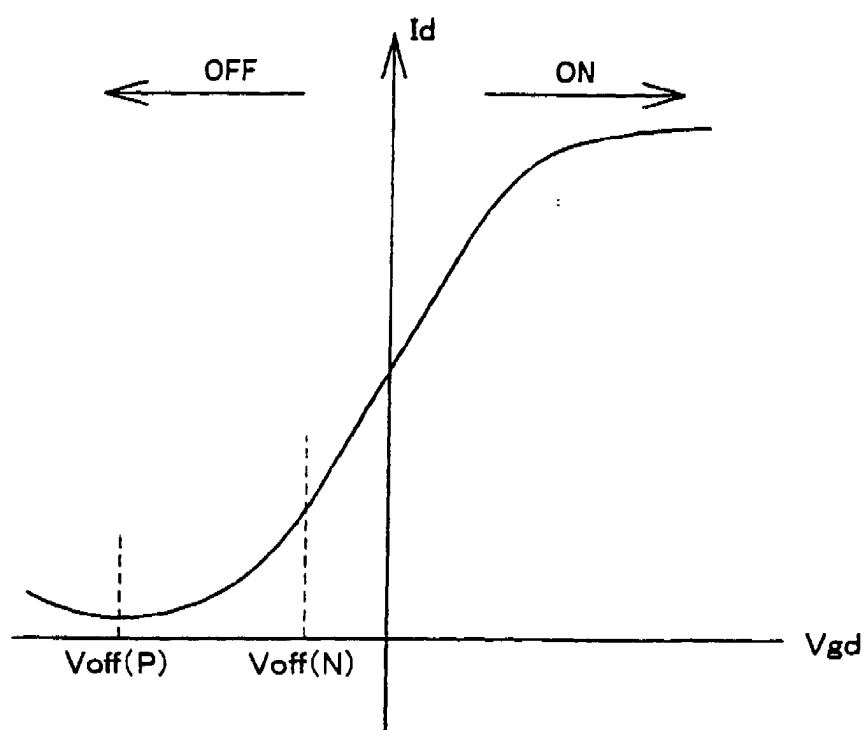

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 195 741 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
17.03.2004 Bulletin 2004/12

(51) Int Cl.7: **G09G 3/36**

(43) Date of publication A2:
10.04.2002 Bulletin 2002/15

(21) Application number: **01123766.6**(22) Date of filing: **04.10.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

- Kumada, Kouji
Tenri-shi, Nara 632-0072 (JP)
- Ohta, Takashige
Yamatokoriyama-shi, Nara 639-1124 (JP)
- Mizukata, Katsuya
Shijonawate-shi, Osaka 575-0013 (JP)

(30) Priority: **06.10.2000 JP 2000308394**


(71) Applicant: **SHARP KABUSHIKI KAISHA**
Osaka 545-8522 (JP)

(74) Representative: **Müller - Hoffmann & Partner**
Patentanwälte,
Innere Wiener Strasse 17
81667 München (DE)

(72) Inventors:
• Yanagi, Toshihiro
Taki-gun Mie 519-2157 (JP)

(54) Active matrix type display device and a driving method thereof

(57) In an active matrix type display device, a signal voltage is applied from a signal line driving circuit via an active element such as a TFT to display electrodes on a matrix substrate, and a common voltage is applied to a counter electrode on a facing substrate so that the common voltage is shared by respective display cells. A level of the common voltage is switched in every refresh period of a different length. Thus, it is possible to appropriately set a value of the common voltage which is a reference for specifying an effective voltage of positive polarity and an effective voltage of negative polarity according to the refresh periods. As a result, even when the refresh periods of a different length exist in a mixed manner, it is possible to equalize the effective voltage of positive polarity and the effective voltage of negative polarity so as to suppress an occurrence of a flicker.

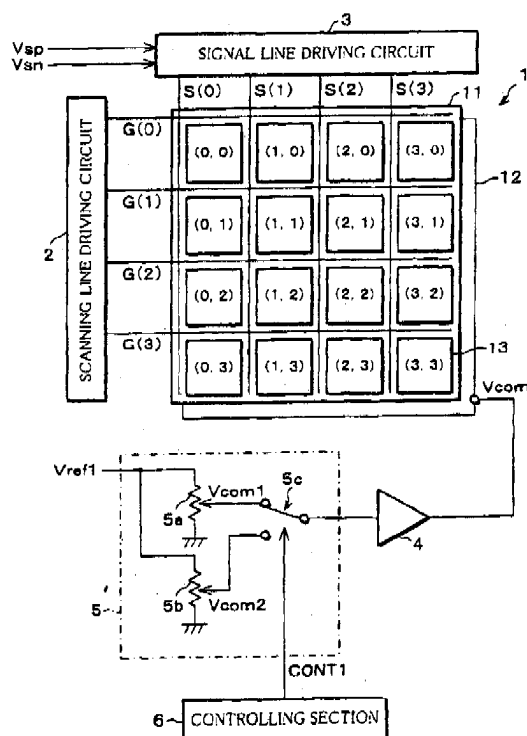FIG. 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 01 12 3766

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 892 494 A (YOSHIDA TOSHIHIKO ET AL) 6 April 1999 (1999-04-06) * column 7, line 21-46 * * column 11, line 31 - column 12, line 17 * * column 12, line 57-59 * * column 13, line 18-46 * * column 14, line 1 - column 15, line 2 * ---	1-23	G09G3/36
X	PATENT ABSTRACTS OF JAPAN vol. 017, no. 619 (P-1644), 15 November 1993 (1993-11-15) & JP 05 196914 A (SHARP CORP), 6 August 1993 (1993-08-06) * abstract * ---	2,14	
A	US 5 945 972 A (FUJIWARA HISAO ET AL) 31 August 1999 (1999-08-31) * column 5, line 53-58 * -----	11	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			G09G
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		12 January 2004	van Wesenbeeck, R
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 01 12 3766

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-01-2004

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5892494	A	06-04-1999	JP	2643100 B2	20-08-1997
			JP	8184809 A	16-07-1996

JP 05196914	A	06-08-1993	NONE		

US 5945972	A	31-08-1999	JP	9212140 A	15-08-1997
			KR	242743 B1	01-02-2000
